




	1	2	3	4	5	6	7	8
The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements								
A	芯数	2	3	4	5	6	7	8
	图形							
B	适配线缆 (AWG)	22	22	22	22	24	24	24
	导体直径 (mm)	1.0	1.0	1.0	1.0	0.8	0.8	0.8
	额定电流 (A)	4	4	4	4	2	2	2
C	额定电压 (V)	60	60	60	30	30	30	30
	绝缘电阻 (MΩ)	≥100	≥100	≥100	≥100	≥100	≥100	≥100
	接触电阻 (mΩ)	≤10	≤10	≤10	≤10	≤10	≤10	≤10

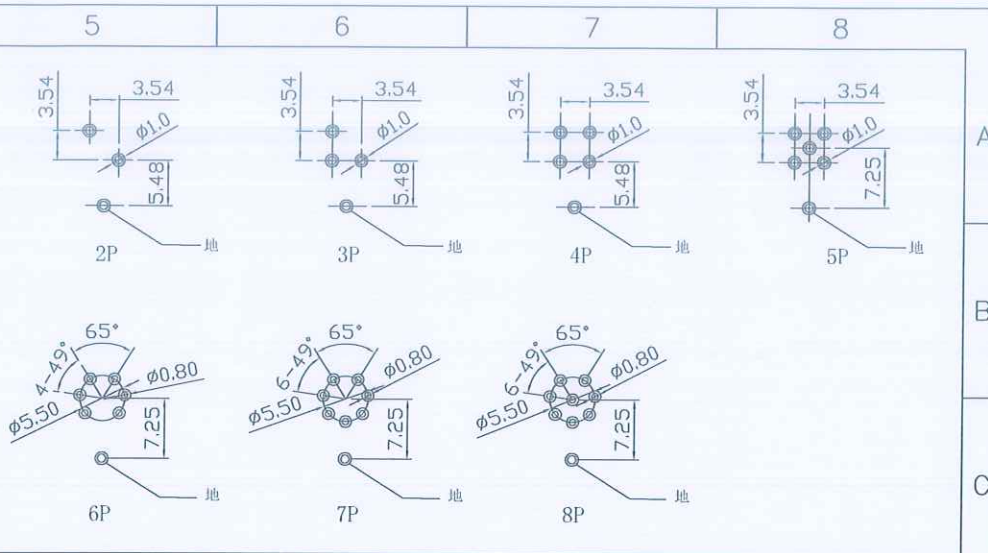

D	技术特性		Coded	
	1. 寿命: >500 mate/unmate cycles		A	
	2. 温度等级: -40°C~+105°C		B	
	3. 防水等级: IP67/IP68		D	
	4. 插入力: ≤50N			
	5. 拔出力: ≥5N			
E	材料规格			

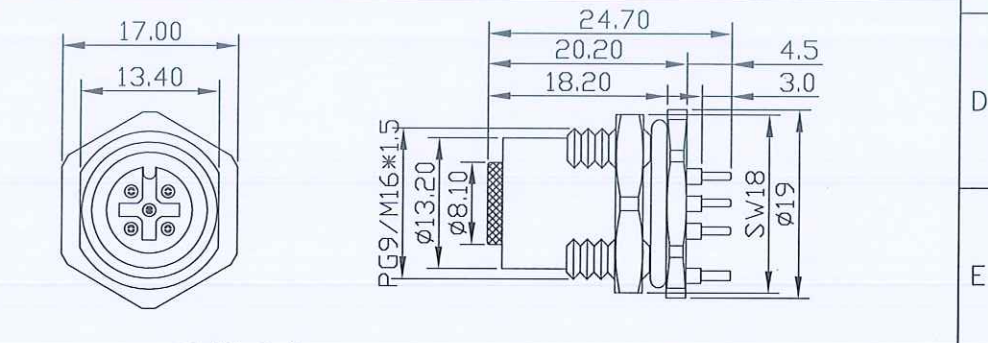

F	E	六角固定座	黄铜	镀镍	Pcs	1
	D	密封圈	EPDM		Pcs	1
	C	外壳材质	黄铜	镀镍	Pcs	1
	B	接触体材质	黄铜	镀金G/F	Pcs	2~8
G	A	绝缘体材质	PA尼龙	黑色	Pcs	1
	No.	Specification	Material	Treat	Unit	Q'ty

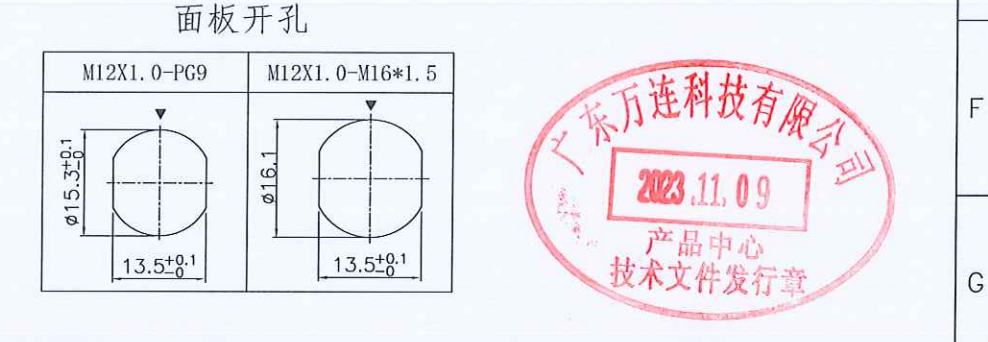

H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
	A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1						APPROVED
					0.0±0.35	X'REF±6'							DESIGNER
					0.00±0.25	X'±3'							DRAWN
			UNIT:mm	0.00±0.10	X'X'±2'								
			SIZE: A4							M12板端母头 前锁面板式PG9/M16 SW17T21.7L+地	REV: A0	SHEET: 1/1	