
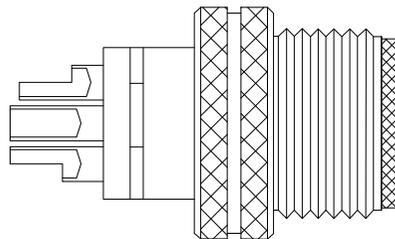

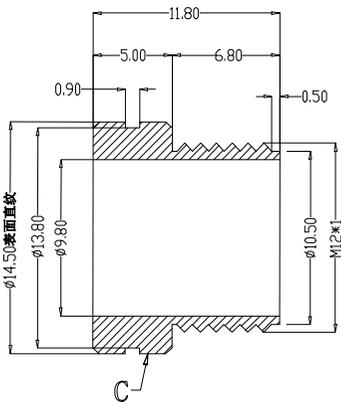

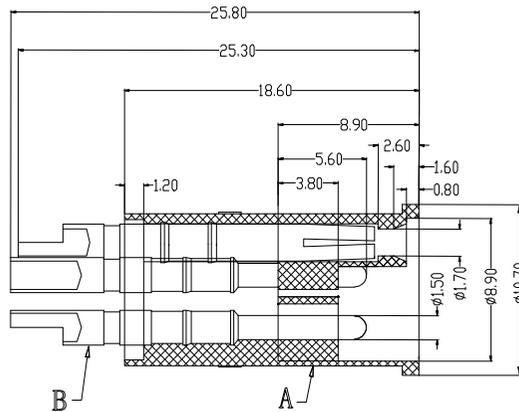
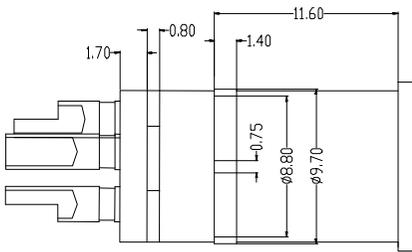


RoHS



组合图

Engagemnr firce	≤50N	Rated volage	63v	PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	≥5N	Rated current	16A	A HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	B CONTACT	BRONZE	GOLD PLATED	3~5
IP rating	IP67	Conract resistangce	≤10MΩ	C NUT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	D			
				E			

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 <b>JCTC</b> ® TERMINAL&CONNECTORS			
A0	NEW RELEASE		LINEAR	ANGLES	1:1			M12LXX-07-117	ENDE05				
			0.0±0.25	X° REF±6°	APPROVED								
			0.00±0.15	X° ±3°	DESIGNER								
			0.000±0.08	X° X' ±2°	DRAWN								
TITLE								M12线端成型式 L编码 公头 焊线式 +11.8L双网纹螺丝		REV	A0	SHEET	1/1