
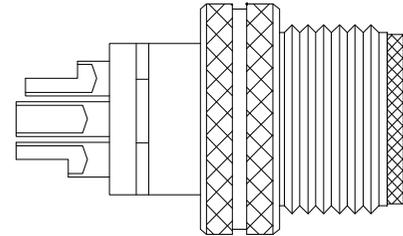

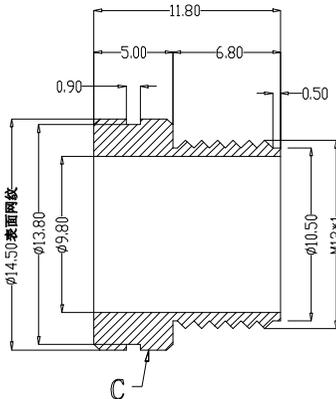

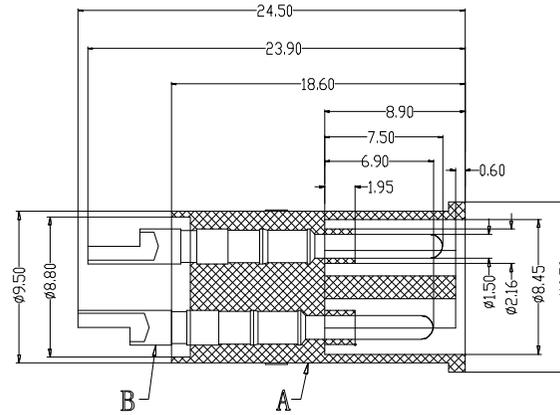
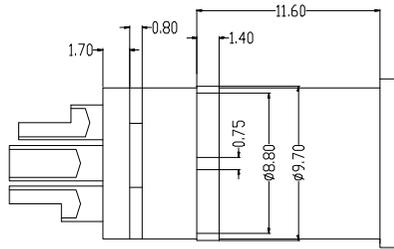


RoHS



组合图

Engagemnr firce	≤50N	Rated volage	630v		PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	≥10N	Rated current	12A	A	HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	B	CONTACT	BRONZE	GOLD PLATED	3~4
IP rating	IP67	Conract resistangce	≤10MΩ	C	NUT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	D				
				E				

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS				
A0	NEW RELEASE			LINEAR	ANGLES	1:1									
				0.0±0.25	X° REF±6°	APPROVED									
				0.00±0.15	X° ±3°	DESIGNER									
			UNIT: MM	0.00±0.08	X° X' ±2°	DRAWN	TITLE								
			SIZE: A4	0.000±0.08	X° X' ±2°		M12线端成型式 S编码 公头 焊线式 屏蔽 +11.8L双网纹螺丝								