
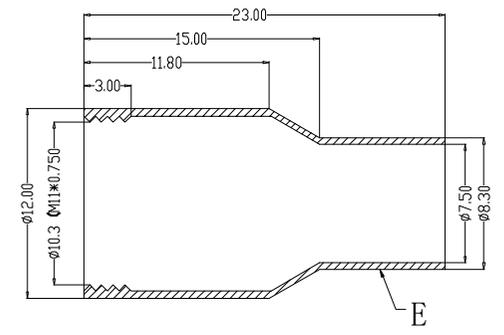
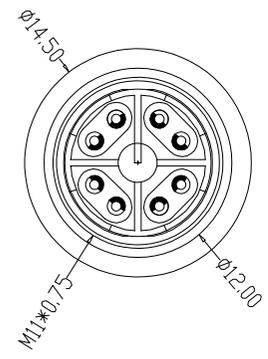
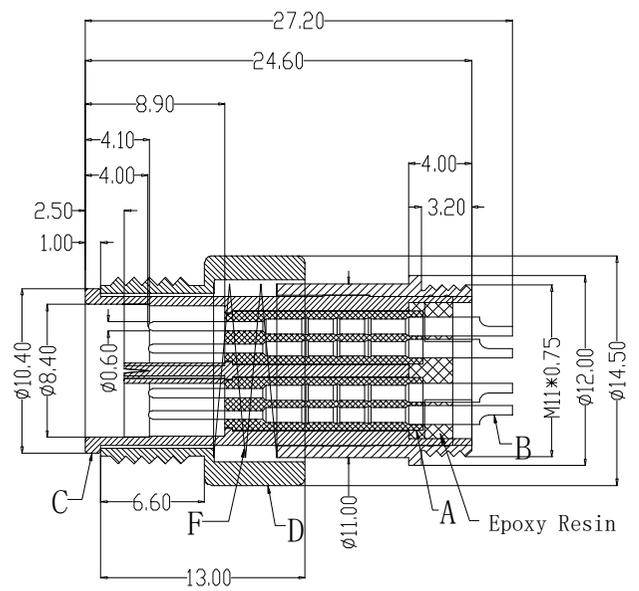
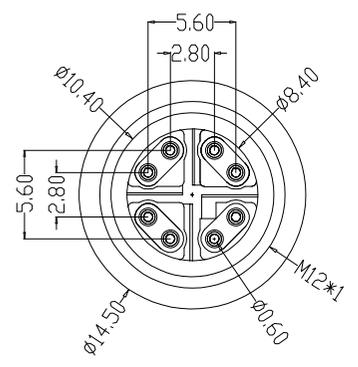
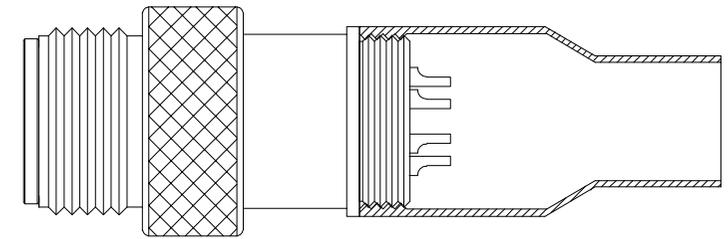
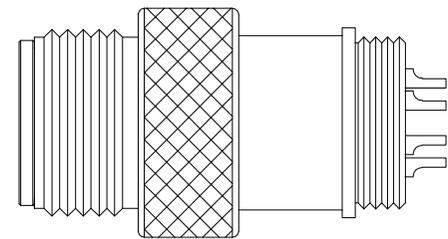


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS

组合图

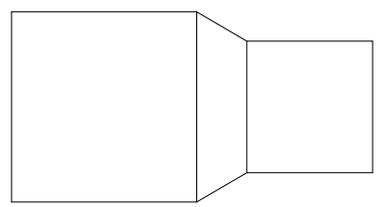

Engagemer firce	≤50N	Rated voltage	48v
Disengagement force	≥10N	Rated current	0.5A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating	IP67	Conract resistance	≤10MΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

PARTS	MARERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	SPECIFY COLOR	1
B CONTACT	BRASS	GOLD PLATED	8
C OUTETCONTACT	ZINC ALLOY	NICKL PLATED	1
D NUT	BRASS	NICKL PLATED	1
E SHOELD	BRASS	NICKL PLATED	1
F SPRING	SS	BLACK	1

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 TERMINAL&CONNECTORS	
A0	NEW RELEASE	21.11.17		LINEAR	1:1			M12X08-01-027	ENDE05		
				ANGLES							
				X'REF±6'							
			SIZE: A4	0.00±0.25				TITLE:		REV: A0	SHEET: 1/1
				0.00±0.10				M12成型式 X编码 8芯公头 焊线式 装配式+锁牙 屏蔽管			