



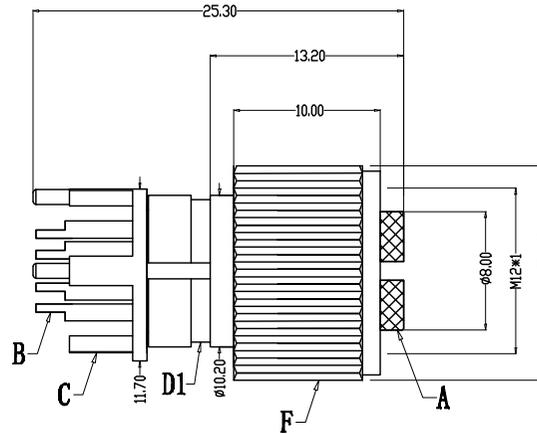
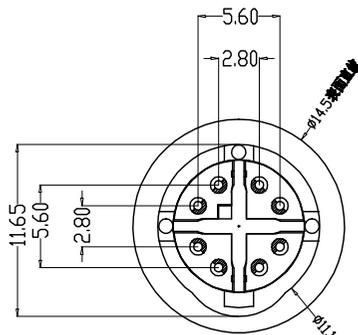

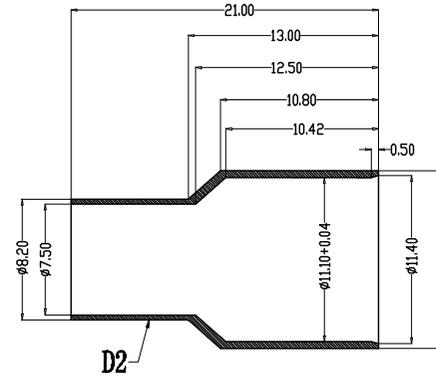
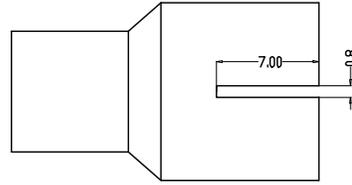


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements



<b>Engagement force</b>	≤50N	<b>Rated voltage</b>	48V
<b>Disengagement force</b>	≥10N	<b>Rated current</b>	0.5A
<b>Mechanical lifespan</b>	≥500	<b>Insulation resistance</b>	≥1000 MΩ
<b>IP rating</b>	IP67	<b>Contact resistance</b>	≤10 mΩ
<b>Flammability</b>	UL94 V-0	<b>Operation Temperature</b>	-40° C ~105° C

PARTS	MATERIALS	TREATMENT	AMOUNT	
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRONZE	GOLD PLATED	8
C	OUTER CONTACT	ZINC ALLOY	NICKL PLATED	1
D	SHIELD	BRASS	NICKL PLATED	1+1
E	O-RING	EPDM	BLACK	1
F	NUT	BRASS	NICKL PLATED	1

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: M12X08-08-027	DWG.NO: ENDE05	 TERMINAL&CONNECTORS
A0	NEW RELEASE			LINEAR	ANGLES						
			UNIT:mm	0.0±0.35	X°REF±6°	DESIGNER			TITLE: M12成型式 X编码 8芯母头 焊线式+10L直纹螺母	REV: A0	SHEET: 1/1
			SIZE: A4	0.00±0.25	X°±3°	DRAWN					