












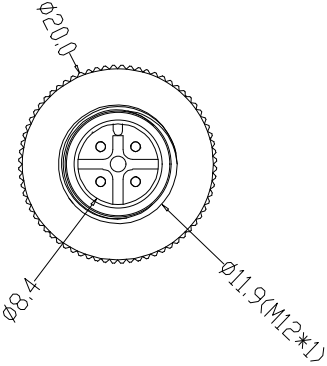
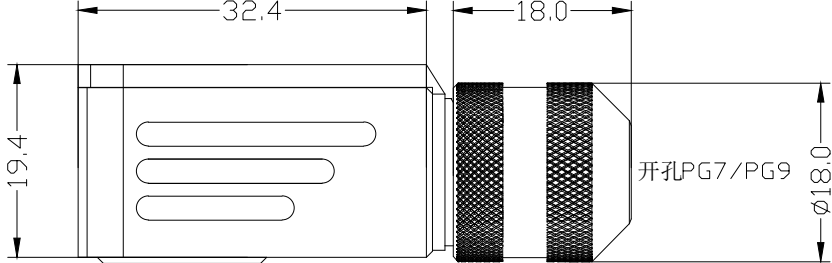



	1	2	3	4	5	6	7	8																																																	
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements																																																									
A	pin位 X 值	2pin 1.00	3pin 1.00	4pin 1.00	5pin 1.00	6pin 0.80	7pin 0.80	8pin 0.80																																																	
B	A-CODE 图 形																																																								
C	B-CODE 图 形																																																								
D	D-CODE 图 形																																																								
E																																																									
F																																																									
G																																																									
H	<table><tr><td></td><td>PARTS</td><td>MATERIALS</td><td>TREATMENT</td><td>AMOUNT</td></tr><tr><td>A</td><td>HOUSING</td><td>PA66+GF</td><td>SPECIFY COLOR</td><td>1+1</td></tr><tr><td>B</td><td>CONTACT</td><td>BRASS</td><td>GOLD PLATED</td><td>2~8</td></tr><tr><td>C</td><td>OUTER CONTACT</td><td>BRASS</td><td>NICKL PLATED</td><td>1</td></tr><tr><td>D</td><td>NUT</td><td>BRASS</td><td>NICKL PLATED</td><td>3</td></tr><tr><td>E</td><td>O-RING</td><td>EPDM</td><td>SPECIFY COLOR</td><td>3</td></tr><tr><td>F</td><td>SHIELD</td><td>BRASS</td><td>NICKL PLATED</td><td>1</td></tr><tr><td>G</td><td></td><td></td><td></td><td></td></tr></table>									PARTS	MATERIALS	TREATMENT	AMOUNT	A	HOUSING	PA66+GF	SPECIFY COLOR	1+1	B	CONTACT	BRASS	GOLD PLATED	2~8	C	OUTER CONTACT	BRASS	NICKL PLATED	1	D	NUT	BRASS	NICKL PLATED	3	E	O-RING	EPDM	SPECIFY COLOR	3	F	SHIELD	BRASS	NICKL PLATED	1	G													
	PARTS	MATERIALS	TREATMENT	AMOUNT																																																					
A	HOUSING	PA66+GF	SPECIFY COLOR	1+1																																																					
B	CONTACT	BRASS	GOLD PLATED	2~8																																																					
C	OUTER CONTACT	BRASS	NICKL PLATED	1																																																					
D	NUT	BRASS	NICKL PLATED	3																																																					
E	O-RING	EPDM	SPECIFY COLOR	3																																																					
F	SHIELD	BRASS	NICKL PLATED	1																																																					
G																																																									
<table><tr><td colspan="2">Engagement force</td><td>≤50N</td><td>Rated voltage</td><td>2-5pin:60V 6-8pin:30V</td></tr><tr><td colspan="2">Disengagement force</td><td>≥5N</td><td>Rated current</td><td>2-5pin:4A 6-8pin:2A</td></tr><tr><td colspan="2">Mechanical lifespan</td><td>≥500</td><td>Insulation resistance</td><td>≥1000M Ω</td></tr><tr><td colspan="2">IP rating</td><td>IP67</td><td>Contact resistance</td><td>≤10m Ω</td></tr><tr><td colspan="2">Flammability</td><td>UL94 V-0</td><td>Operation Temperature</td><td>-40° C~105° C</td></tr></table>								Engagement force		≤50N	Rated voltage	2-5pin:60V 6-8pin:30V	Disengagement force		≥5N	Rated current	2-5pin:4A 6-8pin:2A	Mechanical lifespan		≥500	Insulation resistance	≥1000M Ω	IP rating		IP67	Contact resistance	≤10m Ω	Flammability		UL94 V-0	Operation Temperature	-40° C~105° C																									
Engagement force		≤50N	Rated voltage	2-5pin:60V 6-8pin:30V																																																					
Disengagement force		≥5N	Rated current	2-5pin:4A 6-8pin:2A																																																					
Mechanical lifespan		≥500	Insulation resistance	≥1000M Ω																																																					
IP rating		IP67	Contact resistance	≤10m Ω																																																					
Flammability		UL94 V-0	Operation Temperature	-40° C~105° C																																																					
<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td rowspan="4"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td rowspan="4">PART.NO: M12XXX-01-013</td><td rowspan="5">DWG.NO: ENDE05</td><td colspan="2" rowspan="4"></td></tr><tr><td>A0</td><td>NEW RELEASE</td><td></td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>0.0±0.35</td><td>X°REF±6°</td><td>DESIGNER</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>UNIT:mm</td><td>0.00±0.25</td><td>X°±3°</td><td>DRAWN</td><td></td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X°X' ±2°</td><td></td><td></td><td></td><td colspan="2">TITLE: M12组装式金属款屏蔽系列 公弯头 ABD编码 螺钉压接</td><td>REV: A0</td><td>SHEET: 1/1</td></tr></table>								REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: M12XXX-01-013	DWG.NO: ENDE05			A0	NEW RELEASE		LINEAR	ANGLES	APPROVED						0.0±0.35	X°REF±6°	DESIGNER						UNIT:mm	0.00±0.25	X°±3°	DRAWN					SIZE: A4	0.000±0.10	X°X' ±2°				TITLE: M12组装式金属款屏蔽系列 公弯头 ABD编码 螺钉压接		REV: A0	SHEET: 1/1
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: M12XXX-01-013	DWG.NO: ENDE05																																															
A0	NEW RELEASE			LINEAR	ANGLES	APPROVED																																																			
				0.0±0.35	X°REF±6°	DESIGNER																																																			
				UNIT:mm	0.00±0.25	X°±3°	DRAWN																																																		
			SIZE: A4	0.000±0.10	X°X' ±2°				TITLE: M12组装式金属款屏蔽系列 公弯头 ABD编码 螺钉压接		REV: A0	SHEET: 1/1																																													
	1	2	3	4	5	6	7	8																																																	