
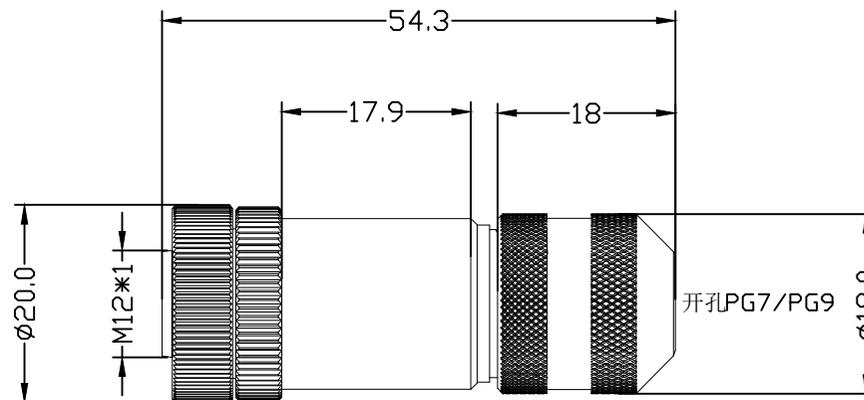


	1	2	3	4	5	6	7	8
pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin	
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80	
A-CODE 图形								
B-CODE 图形								
D-CODE 图形								

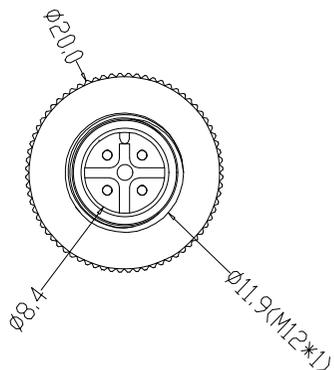

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1+1
B	CONTACT	BRASS	GOLD PLATED	2~8
C	OUTER CONTACT	BRASS	NICKL PLATED	1
D	NUT	BRASS	NICKL PLATED	3
E	O-RING	EPDM	SPECIFY COLOR	3
F	SHIELD	BRASS	NICKL PLATED	1
G				

Engagement force	$\leq 50N$	Rated voltage	2-5pin:60V 6-8pin:30V
Disengagement force	$\geq 5N$	Rated current	2-5pin:4A 6-8pin:2A
Mechanical lifespan	≥ 500	Insulation resistance	$\geq 1000M \Omega$
IP rating	IP67	Contact resistance	$\leq 10m \Omega$
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	NEW RELEASE		LINEAR	ANGLES	1:1			M12XXX-02-012	ENDE05				
			0.0±0.25	X° REF±6°	APPROVED			TITLE	M12组装式金属款屏蔽系列 母直头 ABD编码 螺钉压接	REV	A0	SHEET	1/1
			UNIT: MM	0.00±0.15	X° ±3°	DESIGNER							
			SIZE: A4	0.000±0.08	X° X' ±2°	DRAWN							