













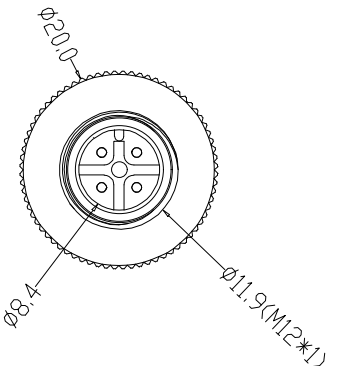
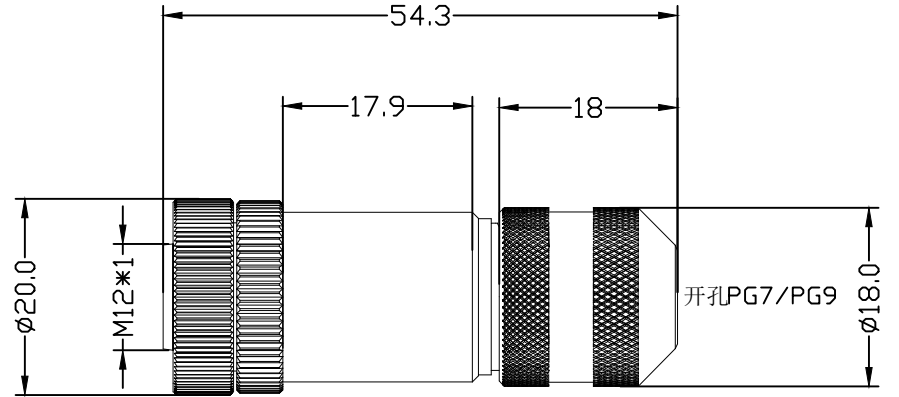


	1	2	3	4	5	6	7	8																																									
	The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements																																																
A	pin位 X 值	2pin 1.00	3pin 1.00	4pin 1.00	5pin 1.00	6pin 0.80	7pin 0.80	8pin 0.80																																									
	A-CODE 图 形																																																
B	B-CODE 图 形																																																
C	D-CODE 图 形																																																
D																																																	
E																																																	
F	<table><tr><th></th><th>PARTS</th><th>MATERIALS</th><th>TREATMENT</th><th>AMOUNT</th></tr><tr><td>A</td><td>HOUSING</td><td>PA66+GF</td><td>SPECIFY COLOR</td><td>1+1</td></tr><tr><td>B</td><td>CONTACT</td><td>BRASS</td><td>GOLD PLATED</td><td>2~8</td></tr><tr><td>C</td><td>OUTER CONTACT</td><td>BRASS</td><td>NICKL PLATED</td><td>1</td></tr><tr><td>D</td><td>NUT</td><td>BRASS</td><td>NICKL PLATED</td><td>3</td></tr><tr><td>E</td><td>O-RING</td><td>EPDM</td><td>SPECIFY COLOR</td><td>3</td></tr><tr><td>F</td><td>SHIELD</td><td>BRASS</td><td>NICKL PLATED</td><td>1</td></tr><tr><td>G</td><td></td><td></td><td></td><td></td></tr></table>									PARTS	MATERIALS	TREATMENT	AMOUNT	A	HOUSING	PA66+GF	SPECIFY COLOR	1+1	B	CONTACT	BRASS	GOLD PLATED	2~8	C	OUTER CONTACT	BRASS	NICKL PLATED	1	D	NUT	BRASS	NICKL PLATED	3	E	O-RING	EPDM	SPECIFY COLOR	3	F	SHIELD	BRASS	NICKL PLATED	1	G					
	PARTS	MATERIALS	TREATMENT	AMOUNT																																													
A	HOUSING	PA66+GF	SPECIFY COLOR	1+1																																													
B	CONTACT	BRASS	GOLD PLATED	2~8																																													
C	OUTER CONTACT	BRASS	NICKL PLATED	1																																													
D	NUT	BRASS	NICKL PLATED	3																																													
E	O-RING	EPDM	SPECIFY COLOR	3																																													
F	SHIELD	BRASS	NICKL PLATED	1																																													
G																																																	
G	<table><tr><td>Engagement force</td><td>≤50N</td><td>Rated voltage</td><td>2-5pin:60V 6-8pin:30V</td></tr><tr><td>Disengagement force</td><td>≥5N</td><td>Rated current</td><td>2-5pin:4A 6-8pin:2A</td></tr><tr><td>Mechanical lifespan</td><td>≥500</td><td>Insulation resistance</td><td>≥1000M Ω</td></tr><tr><td>IP rating</td><td>IP67</td><td>Contact resistance</td><td>≤10m Ω</td></tr><tr><td>Flammability</td><td>UL94 V-0</td><td>Operation Temperature</td><td>-40° C~105° C</td></tr></table>								Engagement force	≤50N	Rated voltage	2-5pin:60V 6-8pin:30V	Disengagement force	≥5N	Rated current	2-5pin:4A 6-8pin:2A	Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω	IP rating	IP67	Contact resistance	≤10m Ω	Flammability	UL94 V-0	Operation Temperature	-40° C~105° C																					
Engagement force	≤50N	Rated voltage	2-5pin:60V 6-8pin:30V																																														
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8pin:2A																																														
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω																																														
IP rating	IP67	Contact resistance	≤10m Ω																																														
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C																																														
H	REV. A0	REVISION RECORD NEW RELEASE	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: M12XXX-02-012	DWG.NO: ENDE05																																						
					LINEAR	ANGLES	APPROVED																																										
					0.0±0.35	X°REF±6°	DESIGNER																																										
					UNIT:mm	0.00±0.25	X°±3°	DRAWN		TITLE: M12组装式金属款屏蔽系列 母直头 ABD编码 螺钉压接																																							
					SIZE: A4	0.000±0.10	X°X' ±2°			REV: A0		SHEET: 1/1																																					
	1	2	3	4	5	6	7	8																																									