



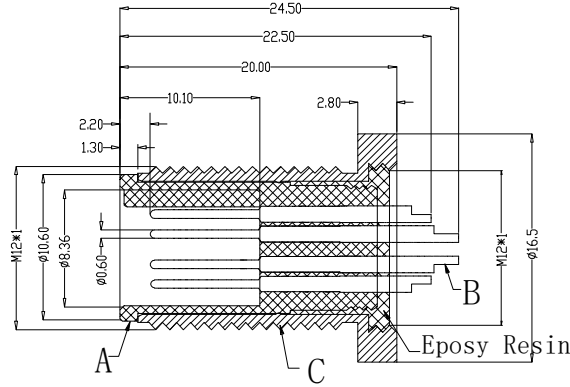

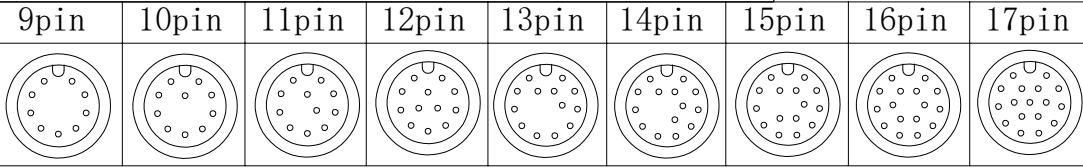



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS



Recommended Panel Cut-out



P/N	TITLE
M12A09-03-111	M12防水 A-CODE 09P线端公头 前锁面板式M12 SW15T后灌胶
M12A10-03-111	M12防水 A-CODE 10P线端公头 前锁面板式M12 SW15T后灌胶
M12A11-03-111	M12防水 A-CODE 11P线端公头 前锁面板式M12 SW15T后灌胶
M12A12-03-111	M12防水 A-CODE 12P线端公头 前锁面板式M12 SW15T后灌胶
M12A13-03-111	M12防水 A-CODE 13P线端公头 前锁面板式M12 SW15T后灌胶
M12A14-03-111	M12防水 A-CODE 14P线端公头 前锁面板式M12 SW15T后灌胶
M12A15-03-111	M12防水 A-CODE 15P线端公头 前锁面板式M12 SW15T后灌胶
M12A16-03-111	M12防水 A-CODE 16P线端公头 前锁面板式M12 SW15T后灌胶
M12A17-03-111	M12防水 A-CODE 17P线端公头 前锁面板式M12 SW15T后灌胶

Engagemer firce	≤50N	Rated volage	30V	PARTS	HOUSING	MARERIALS	TREATMENT	AMOUNT	
Disengagement force	≥10N	Rated current	1.5A		A	PA66+GF	SPECIFY COLOR	1	
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ		B	CONTACT	BRASS	GOLD PLATED	9~17
IP rating	IP67/IP68	Conract resistangce	≤10MΩ		C	OUTER CONTACT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C		D	NUT	BRASS	NICKL PLATED	1
				E	O-RING	EPDM	BLACK	1	

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.11.17	LINEAR	1:1			M12XXX-03-111	ENDE05
			ANGLES	APPROVED				
			0.0±0.35	DESIGNER				
			X°REF±6°	DRAWN				
			UNIT:mm				TITLE:	
			0.00±0.25				M12防水 9~17P线端公头 前锁板M12 SW15T	
			X°±3°					REV: A0
			0.000±0.10					SHEET: 1/1
			X°X' ±2°					



WanLian Technology Co., Ltd