


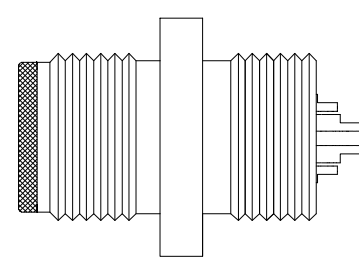
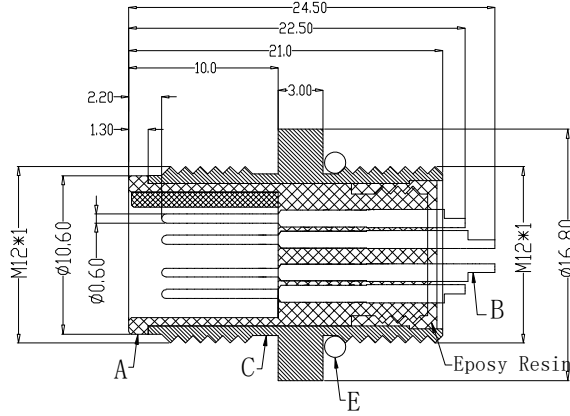
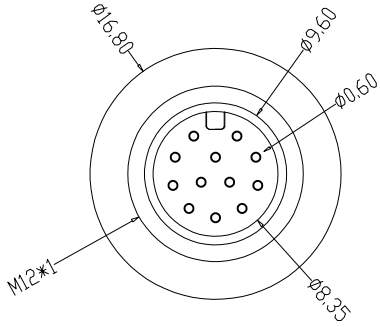
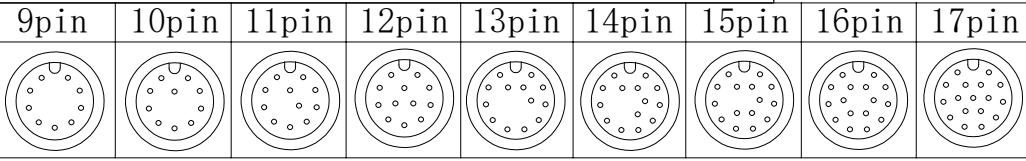



The product using material and processing must conform to the "WL-PZ-001" HSF technical standard requirements

RoHS



Recommended Panel Cut-out



P/N	TITLE
M12A09-03-121	M12防水 A-CODE 9P线端头 后锁面板式M12 F16.8T
M12A10-03-121	M12防水 A-CODE 10P线端头 后锁面板式M12 F16.8T
M12A11-03-121	M12防水 A-CODE 11P线端头 后锁面板式M12 F16.8T
M12A12-03-121	M12防水 A-CODE 12P线端头 后锁面板式M12 F16.8T
M12A13-03-121	M12防水 A-CODE 13P线端头 后锁面板式M12 F16.8T
M12A14-03-121	M12防水 A-CODE 14P线端头 后锁面板式M12 F16.8T
M12A15-03-121	M12防水 A-CODE 15P线端头 后锁面板式M12 F16.8T
M12A16-03-121	M12防水 A-CODE 16P线端头 后锁面板式M12 F16.8T
M12A17-03-121	M12防水 A-CODE 17P线端头 后锁面板式M12 F16.8T

Engagemnr firce	≤50N	Rated volage	30V					
Disengagement force	≥10N	Rated current	1.5A	A	HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	B	CONTACT	BRASS	GOLD PLATED	9~17
IP rating	IP67/IP68	Conract resistangce	≤10MΩ	C	OUTER CONTACT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	D	NUT	BRASS	NICKL PLATED	1
				E	O-RING	EPDM	BLACK	1

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: M12XXX-03-121	DWG.NO: ENDE05	WanLian Technology Co., Ltd
AO	NEW RELEASE			LINEAR	ANGLES						
				0.0±0.35	X'REF±6°	APPROVED			TITLE: M12防水 9~17P线端头 后锁板式M12 F16.8T		REV: AO
			SIZE: A4	0.00±0.25	X'±3'	DESIGNER					SHEET: 1/1
				0.000±0.10	X'X' ±2'	DRAWN					