


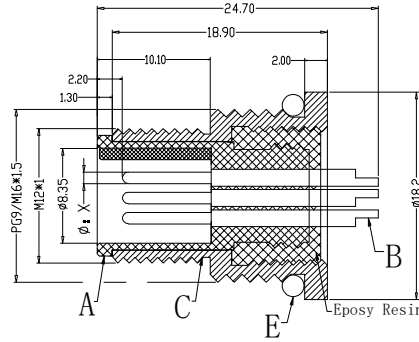




The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

PIN位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80
A-CODE 图形							
B-CODE 图形							
D-CODE 图形							



Recommended Panel Cut-out

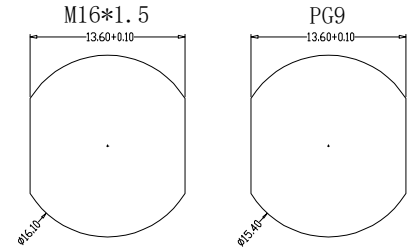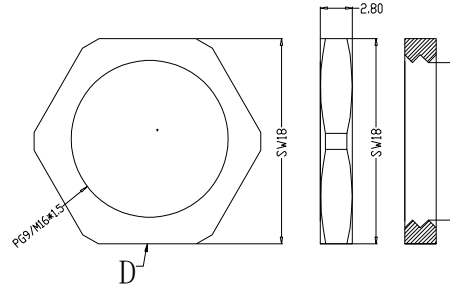

P/N	TITLE
M12A02-03-122	M12防水 A-CODE 2P线端公头 前锁面板式PG9/M16 F17T
M12A03-03-122	M12防水 A-CODE 3P线端公头 前锁面板式PG9/M16 F17T
M12A04-03-122	M12防水 A-CODE 4P线端公头 前锁面板式PG9/M16 F17T
M12A05-03-122	M12防水 A-CODE 5P线端公头 前锁面板式PG9/M16 F17T
M12A06-03-122	M12防水 A-CODE 6P线端公头 前锁面板式PG9/M16 F17T
M12A07-03-122	M12防水 A-CODE 7P线端公头 前锁面板式PG9/M16 F17T
M12A08-03-122	M12防水 A-CODE 8P线端公头 前锁面板式PG9/M16 F17T
M12B02-03-122	M12防水 B-CODE 2P线端公头 前锁面板式PG9/M16 F17T
M12B03-03-122	M12防水 B-CODE 3P线端公头 前锁面板式PG9/M16 F17T
M12B04-03-122	M12防水 B-CODE 4P线端公头 前锁面板式PG9/M16 F17T
M12B05-03-122	M12防水 B-CODE 5P线端公头 前锁面板式PG9/M16 F17T
M12D02-03-122	M12防水 D-CODE 2P线端公头 前锁面板式PG9/M16 F17T
M12D03-03-122	M12防水 D-CODE 3P线端公头 前锁面板式PG9/M16 F17T
M12D04-03-122	M12防水 D-CODE 4P线端公头 前锁面板式PG9/M16 F17T

Engagemnr firce	≤50N	Rated volage	2-5pin:60v 6-8PIN:30V	PARTS	MARERIALS	TREATMENT	AMOUNT		
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8PIN:2A		A	HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ		B	CONTACT	BRASS	GOLD PLATED	2~8
IP rating	IP67/IP68	Conract resistangce	≤10MΩ		C	OUTER CONTACT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C		D	NUT	BRASS	NICKL PLATED	1
				E	O-RING	EPDM	BLACK	1	

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:
AO	NEW RELEASE	21.11.17	LINEAR	1:1			M12XXX-03-122	ENDE05
			ANGLES	APPROVED				
			0.0±0.35	DESIGNER			TITLE:	
			X'REF±6'	DRAWN			M12防水 2~8P线端公头 前锁面板式PG9/M16 F17T	
			UNIT:mm					REV: AO
			0.00±0.25					SHEET: 1/1
			X'±3'					
			0.000±0.10					
			X'X' ±2'					

WanLian Technology Co., Ltd

REV: AO SHEET: 1/1