The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

9pin	10pin	11pin	12pin	13pin	14pin	15pin	16pin	17pin



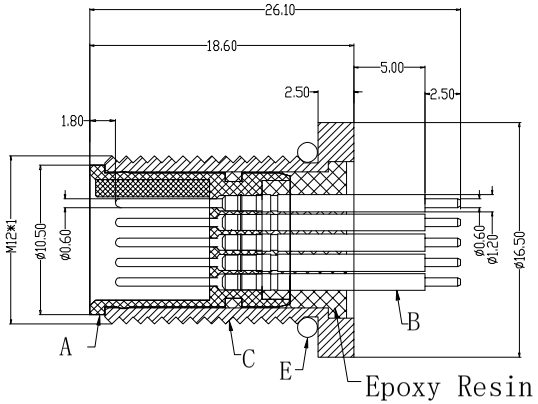

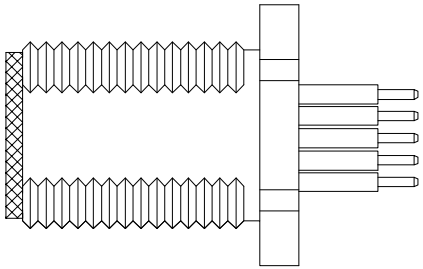

9pin~12pin



13pin~17pin



Recommended Panel Cut-out







P/N	TITLE
M12A09-03-131	M12防水 A-CODE 09P板端公头 前锁面板式M12 SW15T-26.1L
M12A10-03-131	M12防水 A-CODE 10P板端公头 前锁面板式M12 SW15T-26.1L
M12A11-03-131	M12防水 A-CODE 11P板端公头 前锁面板式M12 SW15T-26.1L
M12A12-03-131	M12防水 A-CODE 12P板端公头 前锁面板式M12 SW15T-26.1L
M12A13-03-131	M12防水 A-CODE 13P板端公头 前锁面板式M12 SW15T-26.1L
M12A14-03-131	M12防水 A-CODE 14P板端公头 前锁面板式M12 SW15T-26.1L
M12A15-03-131	M12防水 A-CODE 15P板端公头 前锁面板式M12 SW15T-26.1L
M12A16-03-131	M12防水 A-CODE 16P板端公头 前锁面板式M12 SW15T-26.1L
M12A17-03-131	M12防水 A-CODE 17P板端公头 前锁面板式M12 SW15T-26.1L

Engagemenr firce	≤50N	Rated volage	30V
Disengagement force	≥10N	Rated current	1.5A
Mechanical lifespan	≥500	Insulation resisrance	≥1000MΩ
IP rating	IP67/IP68	Conract resistangce	≤10MΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

	PARTS	MARERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRASS	GOLD PLATED	9~17
C	OUTER CONTACT	BRASS	NICKL PLATED	1
D	NUT	BRASS	NICKL PLATED	1
E	O-RING	EPDM	BLACK	1

REV.	REVISION RECORD	DATE
A0	NEW RELEASE	

UNIT: mm

SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.35	X°REF±6°
0.00±0.25	X°±3°
0.000±0.10	X°X' ±2°

SCALE: 1:1	NAME	DATE
APPROVED		
DESIGNER		
DRAWN		

PART.NO: M12XXX-03-131

DWG.NO: ENDE05

TITLE: M12防水 9~17板端公头 前锁板式M12 SW15T-26.1L

万连科技 WanLian Technology Co., Ltd

REV: A0

SHEET: 1/1