


1 2 3 4 5 6 7 8

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard requirements


RoHS

A



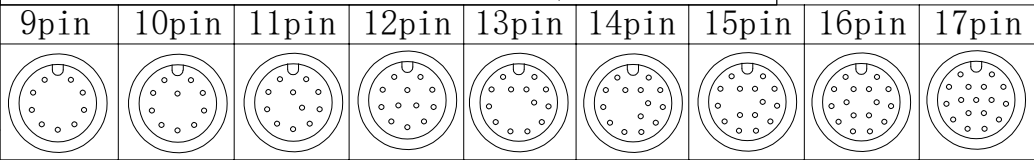


B

13pin~17pin




C

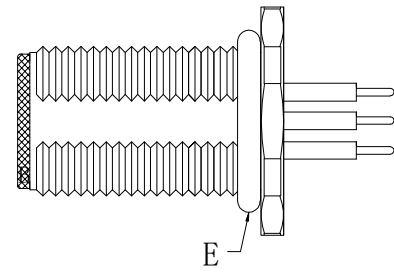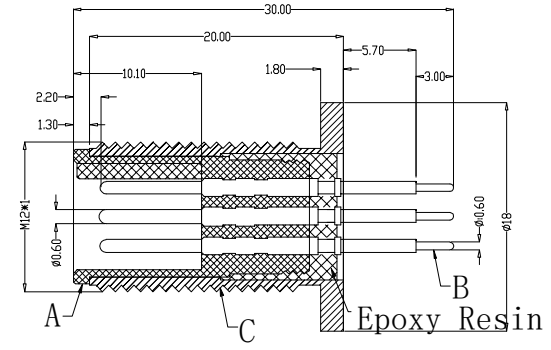



D

9pin~12pin



E

Recommended Panel Cut-out

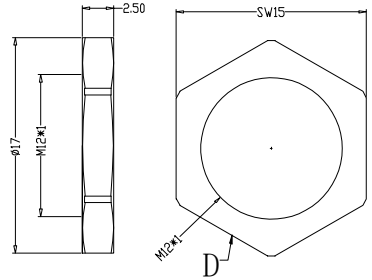

F

P/N	TITLE
M12A09-03-132	M12防水 A-CODE 09P板端公头 前锁面板式M12 SW17T-30L
M12A10-03-132	M12防水 A-CODE 10P板端公头 前锁面板式M12 SW17T-30L
M12A11-03-132	M12防水 A-CODE 11P板端公头 前锁面板式M12 SW17T-30L
M12A12-03-132	M12防水 A-CODE 12P板端公头 前锁面板式M12 SW17T-30L
M12A13-03-132	M12防水 A-CODE 13P板端公头 前锁面板式M12 SW17T-30L
M12A14-03-132	M12防水 A-CODE 14P板端公头 前锁面板式M12 SW17T-30L
M12A15-03-132	M12防水 A-CODE 15P板端公头 前锁面板式M12 SW17T-30L
M12A16-03-132	M12防水 A-CODE 16P板端公头 前锁面板式M12 SW17T-30L
M12A17-03-132	M12防水 A-CODE 17P板端公头 前锁面板式M12 SW17T-30L

Engagemnr firce	≤50N	Rated volage	30V	PARTS	MARERIALS	TREATMENT	AMOUNT	
Disengagement force	≥10N	Rated current	1.5A		A	HOUSING	PA66+GF	SPECIFY COLOR 1
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ		B	CONTACT	BRASS	GOLD PLATED 9~17
IP rating	IP67/IP68	Conract resistangce	≤10MΩ		C	OUTER CONTACT	BRASS	NICKL PLATED 1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C		D	NUT	BRASS	NICKL PLATED 1
				E	O-RING	EPDM	BLACK 1	

G

H

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		WanLian Technology Co., Ltd
A0	NEW RELEASE			LINEAR	ANGLES							
				0.0±0.35	X'REF±6°	DESIGNER			TITLE:			
				UNIT:mm	0.00±0.25	X'±3'	DRAWN		M12防水 9~17板端公头 前锁面板式M12 SW17T-30L			
			SIZE: A4	0.000±0.10	X'X' ±2'							

1 2 3 4 5 6 7 8