
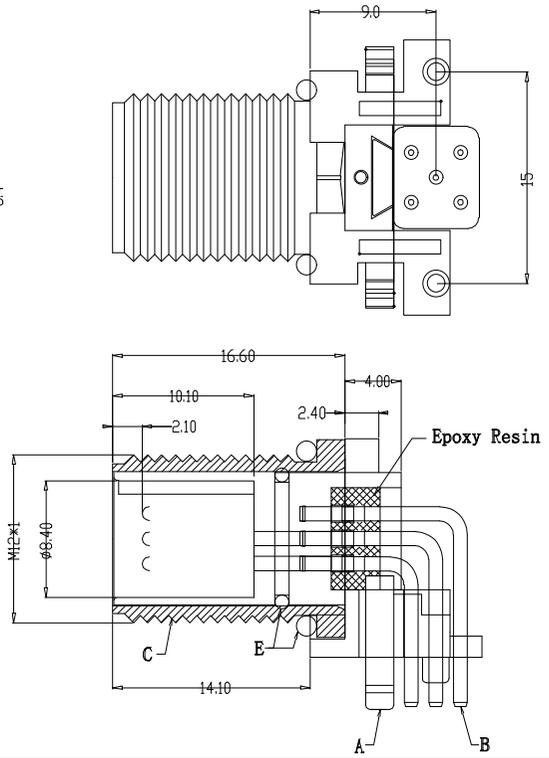
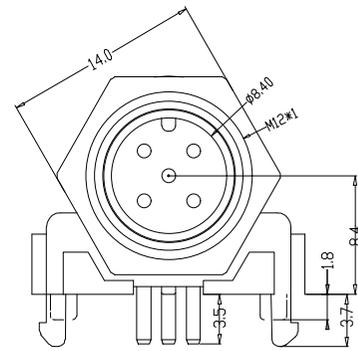
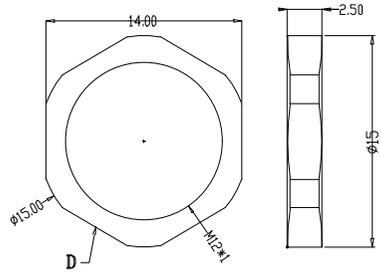
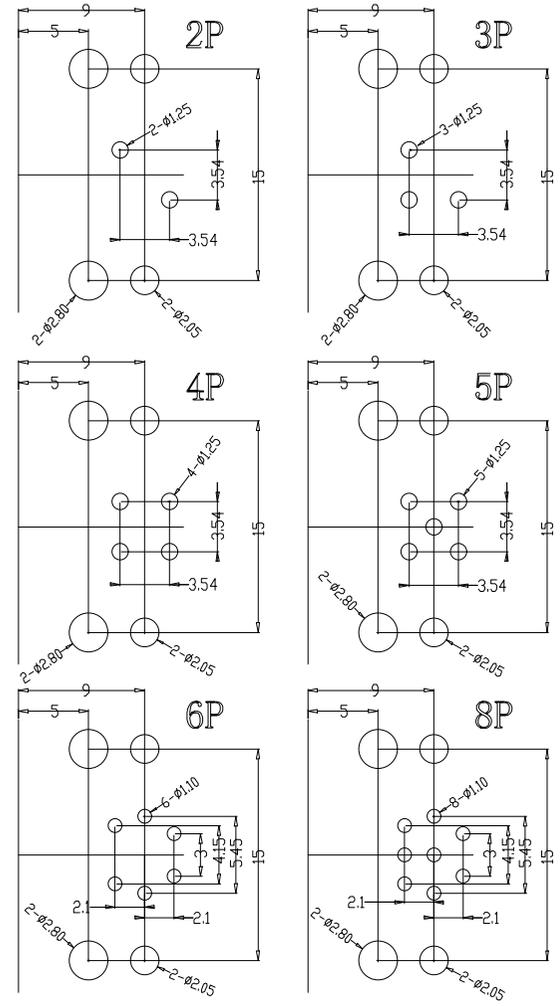


PIN位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80
A-CODE 图形							
B-CODE 图形							
D-CODE 图形							

RoHS

Recommended Panel Cut-out



Engagemnr firce	≤50N	Rated volage	2-5pin:60v 6-8PIN:30V		PARTS	MATERIALS	TREATMENT	AMOUNT
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8PIN:2A	A	HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	B	CONTACT	BRASS	GOLD PLATED	2~8
IP rating	IP67	Contract resistange	≤10MΩ	C	OUTER CONTACT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	D	NUT	BRASS	NICKL PLATED	1
				E	O-RING	EPDM	BLACK	1

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	NEW RELEASE		LINEAR	ANGLES	1:1			M12XXX-03-133	ENDE05				
			0.0±0.25	X° REF±6°	APPROVED								
			0.00±0.15	X° ±3°	DESIGNER			TITLE					
			0.000±0.08	X° X' ±2°	DRAWN			M12前锁面板 公弯头 ABD编码 PCB式 开孔M12					
			UNIT: MM							REV	A0	SHEET	1/1