









The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

PIN位	2PIN	3PIN	4PIN	5PIN	6PIN	7PIN	8PIN
X值	1.50	1.00	1.00	1.00	1.00	1.00	1.00
图形							

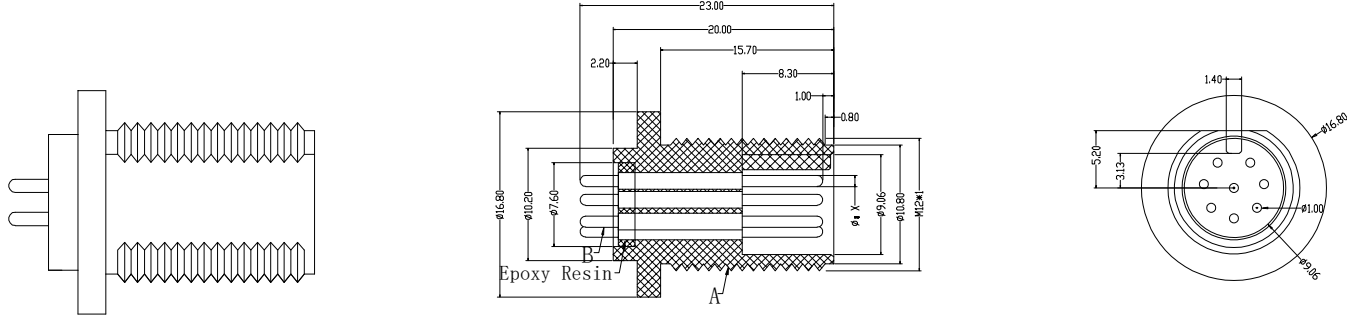

Recommended Panel Cut-out



P/N	TITLE
M12Y02-03-140	M12防水 2P板端公头 Y-CODE 前锁面板式Y-CJ款
M12Y03-03-140	M12防水 3P板端公头 Y-CODE 前锁面板式Y-CJ款
M12Y04-03-140	M12防水 4P板端公头 Y-CODE 前锁面板式Y-CJ款
M12Y05-03-140	M12防水 5P板端公头 Y-CODE 前锁面板式Y-CJ款
M12Y06-03-140	M12防水 6P板端公头 Y-CODE 前锁面板式Y-CJ款
M12Y07-03-140	M12防水 7P板端公头 Y-CODE 前锁面板式Y-CJ款
M12Y08-03-140	M12防水 8P板端公头 Y-CODE 前锁面板式Y-CJ款

Engagemnr firce	$\leq 50N$	Rated volage	2-5pin:60v 6-8PIN:30V
Disengagement force	$\geq 5N$	Rated current	2pin:4A 3-8PIN:2A
Mechanical lifespan	$\geq 500$	Insulation resistance	$\geq 1000M\Omega$
IP rating	IP67/IP68	Conract resistangce	$\leq 10M\Omega$
Flammability	UL94 V-0	Operation Temperature	$-40^\circ C \sim 105^\circ C$

	PARTS	MARERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRASS	GOLD PLATED	2~8
C	OUTER CONTACT	BRASS	NICKL PLATED	1
D	NUT	BRASS	NICKL PLATED	1
E	O-RING	EPDM	BLACK	1

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: M12XXX-03-140	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES						
			UNIT:mm	0.0±0.35	X'REF±6'	DESIGNER			TITLE: M12防水 2~8P线端公头 Y-CODE 前锁面板式Y-CJ款	REV: A0	SHEET: .
			SIZE: A4	0.00±0.25	X'±3'	DRAWN					