


















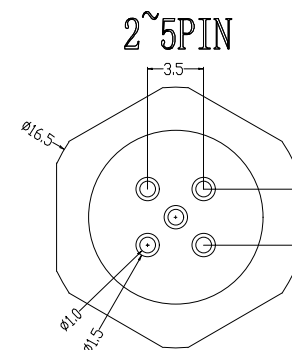
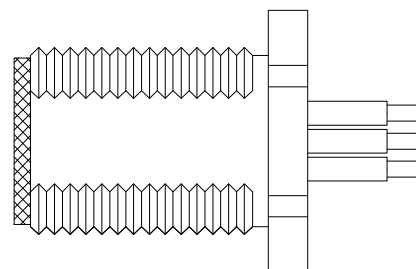
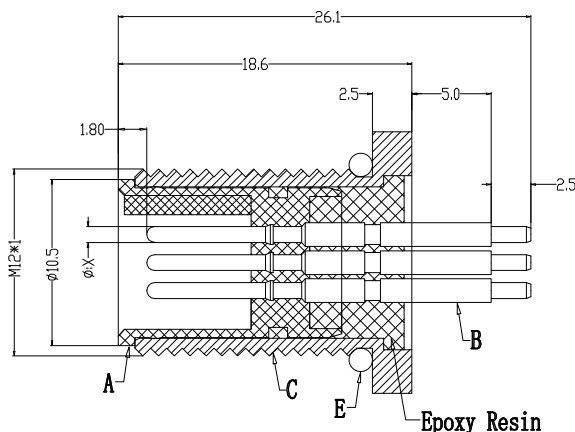


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80
A-CODE 图 形							
B-CODE 图 形							
D-CODE 图 形							



Recommended Panel Cut-out



	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRASS	GOLD PLATED	2~8
C	OUTER CONTACT	BRASS	NICKL PLATED	1
D	NUT	BRASS	NICKL PLATED	1
E	O-RING	EPDM	SPECIFY COLOR	1
C F				

Engagement force	≤50N	Rated voltage	2-5pin:60V 6-8pin:30V
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8pin:2A
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω
IP rating	IP67	Contact resistance	≤10m Ω
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: M12XXX-03-202-M12	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE			LINEAR	ANGLES	APPROVED						
				0.0±0.35	X*REF±6°							
				UNIT:mm	0.00±0.25	X'±3°	DESIGNER			TITLE: M12前锁面板 公直头 ABD编码 PCB式 开孔M12		
				SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN					