

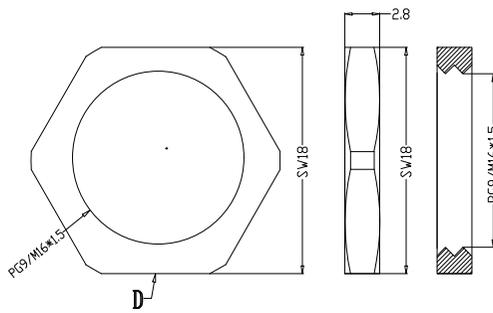
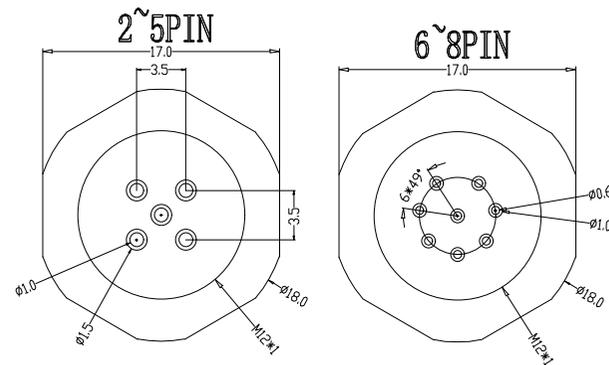
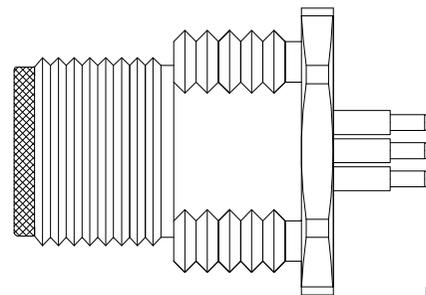


	1	2	3	4	5	6	7	8
pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin	
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80	
A-CODE 图形								
B-CODE 图形								
D-CODE 图形								

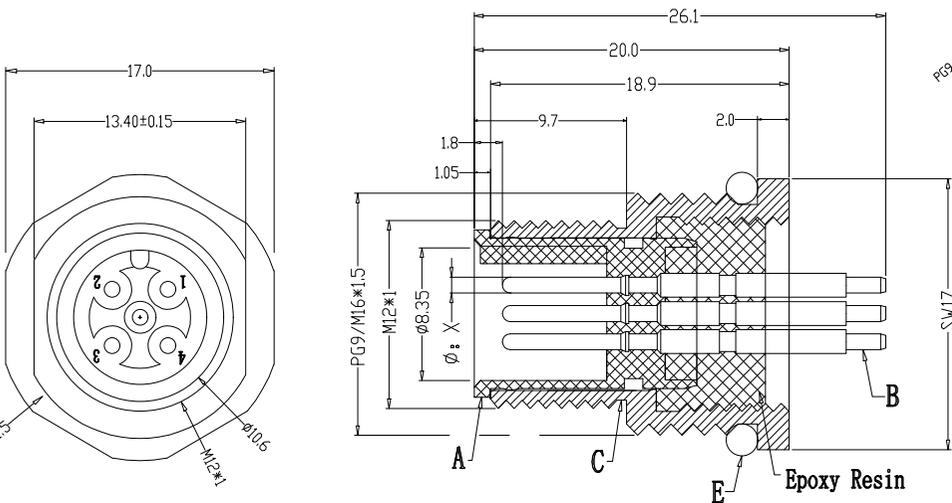

Recommended Panel Cut-out  
M16\*1.5      PG9

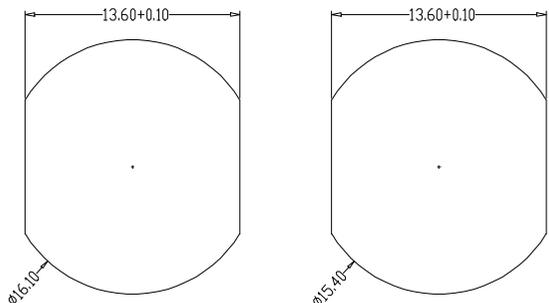

Engagement force	≤ 50N	Rated voltage	2-5pin:60V 6-8pin:30V
Disengagement force	≥ 5N	Rated current	2-5pin:4A 6-8pin:2A
Mechanical lifespan	≥ 500	Insulation resistance	≥ 1000M Ω
IP rating	IP67	Contact resistance	≤ 10m Ω
Flammability	UL94 V 0	Operation Temperature	-40° C~105° C

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRASS	GOLD PLATED	2~8
C	OUTER CONTACT	BRASS	NICKL PLATED	1
D	NUT	BRASS	NICKL PLATED	1
E	O-RING	EPDM	SPECIFY COLOR	1

REV.	REVISION RECORD	DATE
AO	NEW RELEASE	

GENERAL TOLERANCES		SCALE	NAME	DATE
LINEAR	ANGLES	1:1		
0.0±0.25	X° REF±6°	APPROVED		
0.00±0.15	X° ±3°	DESIGNER		
0.000±0.08	X° X' ±2°	DRAWN		

PART NO.	DWG NO.
M12XXX-03-204-M16	ENDE05
TITLE	
M12前锁面板 公直头 ABD编码 PCB式 开孔M16	

**JCTC**®  
TERMINAL&CONNECTORS

REV	AO	SHEET	1/1
-----	----	-------	-----