
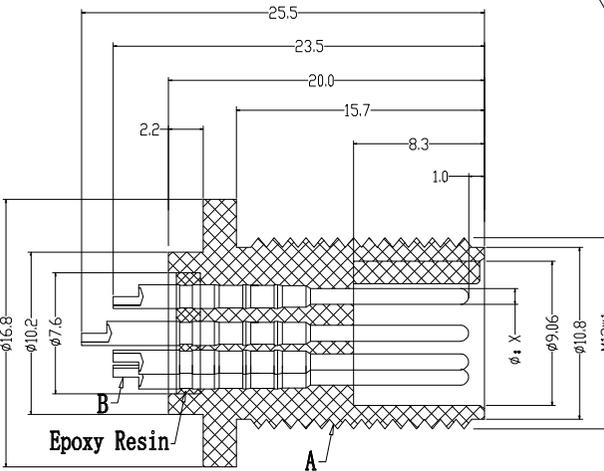


	1	2	3	4	5	6	7	8		
pin位	2pin	3pin-A	3pin-C	4pin	5pin	6pin-72°	6pin-258°	6pin	7pin	8pin
X 值	1.50	1.50	1.50	1.00	1.00	1.00	1.00	1.00	1.00	1.00
图形										

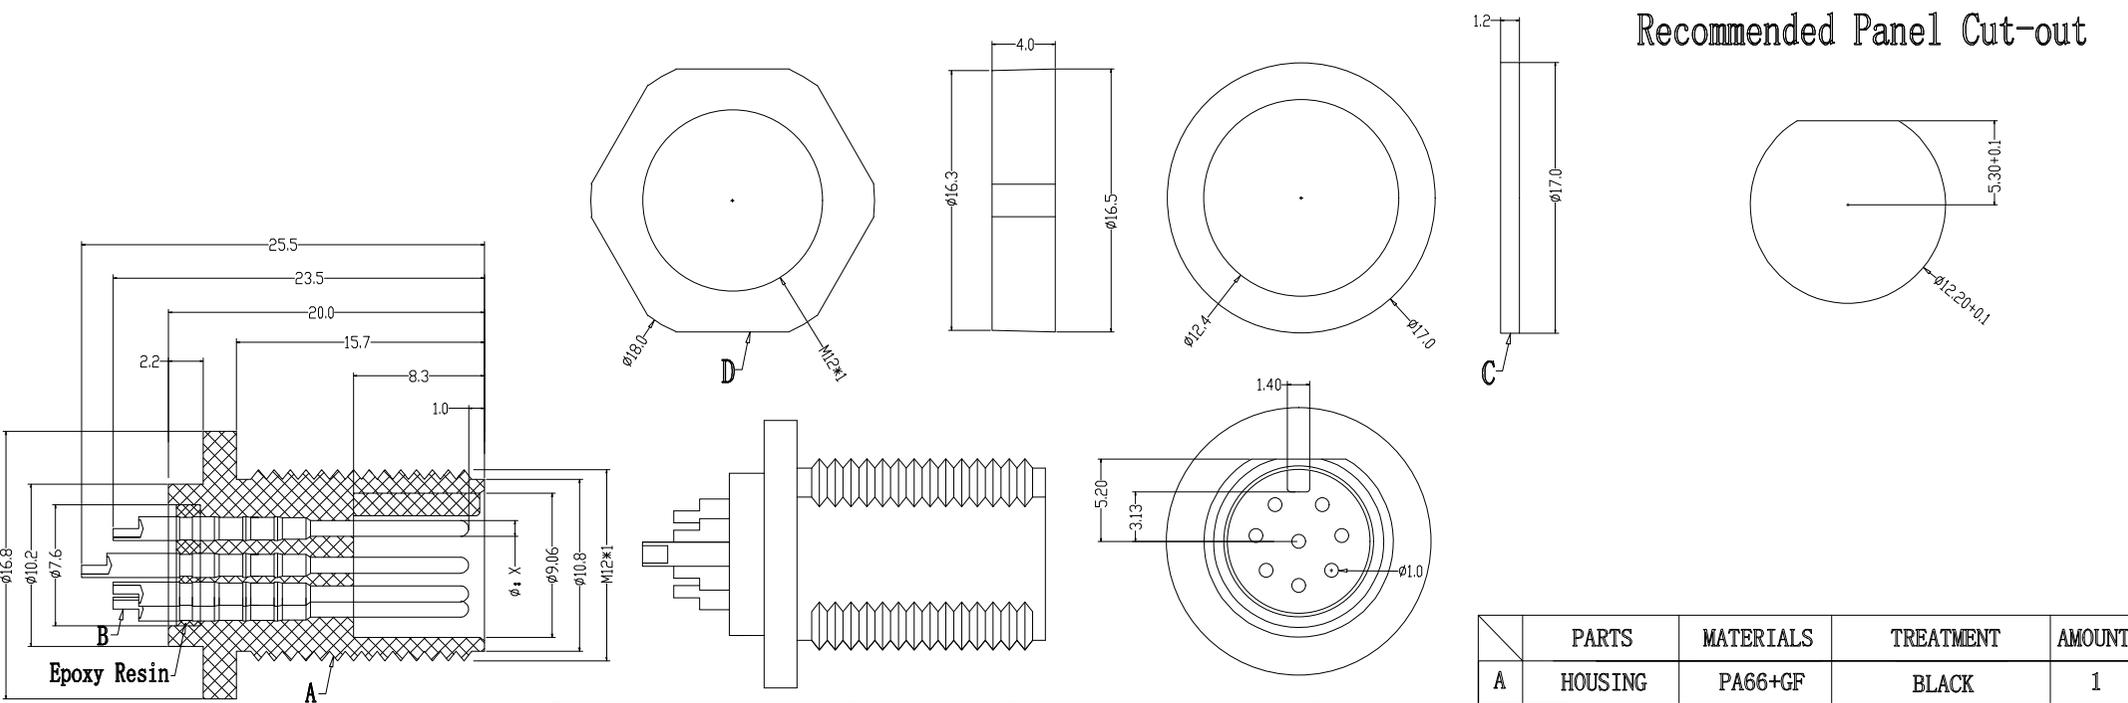

Engagement force	≤ 50N	Rated voltage	2-5pin:60V 6-8pin:30V
Disengagement force	≥ 5N	Rated current	2pin: 7.5A 3-8pin:4A
Mechanical lifespan	≥ 500	Insulation resistance	≥ 1000M Ω
IP rating	IP67	Contact resistance	≤ 10m Ω
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	BLACK	1
B	CONTACT	BRASS	GOLD PLATED	2~8
C	SHIM	SILICA GEL	BLACK	1
D	NUT	PA66+GF	BLACK	1
E				
F				

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 <b>JCTC</b> ® TERMINAL&CONNECTORS			
AO	NEW RELEASE		LINEAR	ANGLES	1:1			M12XXX-03-205-M12	ENDE05				
			0.0±0.25	X° REF±6°	APPROVED								
			0.00±0.15	X° ±3°	DESIGNER								
			UNIT: MM	0.00±0.08	X° X' ±2°	DRAWN		TITLE		REV	AO	SHEET	1/1
			SIZE: A4	0.000±0.08	X° X' ±2°			M12前锁面板 公直头 A编码 全塑胶款焊线式 开孔M12 单切边					