



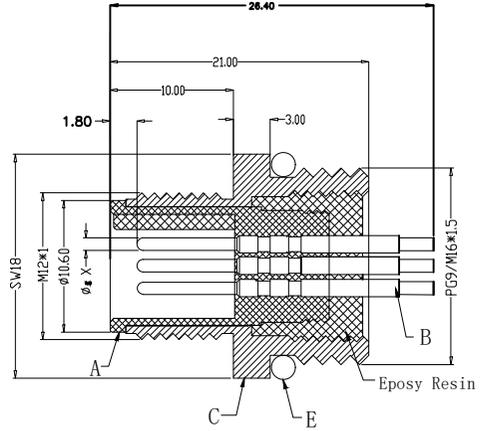




RoHS

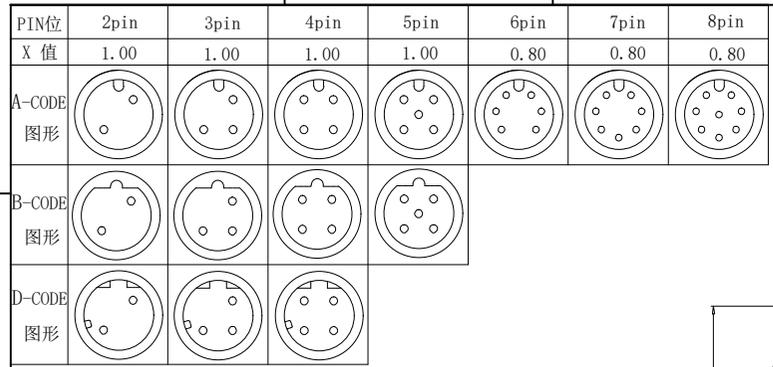

组合图

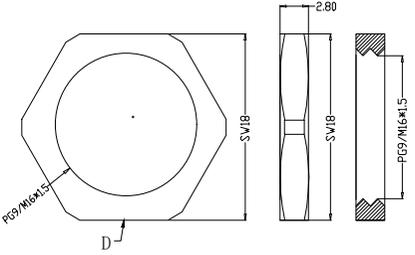

Recommended Panel Cut-out

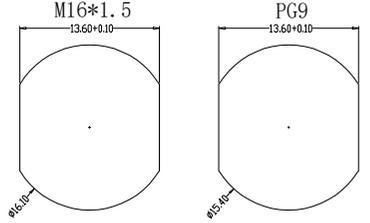

P/N	TITLE
M12A02-03-302-M16	M12防水 A-CODE 2P板端公头 后锁面板式 PG9/M16 SW18T
M12A03-03-302-M16	M12防水 A-CODE 3P板端公头 后锁面板式 PG9/M16 SW18T
M12A04-03-302-M16	M12防水 A-CODE 4P板端公头 后锁面板式 PG9/M16 SW18T
M12A05-03-302-M16	M12防水 A-CODE 5P板端公头 后锁面板式 PG9/M16 SW18T
M12A06-03-302-M16	M12防水 A-CODE 6P板端公头 后锁面板式 PG9/M16 SW18T
M12A07-03-302-M16	M12防水 A-CODE 7P板端公头 后锁面板式 PG9/M16 SW18T
M12A08-03-302-M16	M12防水 A-CODE 8P板端公头 后锁面板式 PG9/M16 SW18T
M12B02-03-302-M16	M12防水 B-CODE 2P板端公头 后锁面板式 PG9/M16 SW18T
M12B03-03-302-M16	M12防水 B-CODE 3P板端公头 后锁面板式 PG9/M16 SW18T
M12B04-03-302-M16	M12防水 B-CODE 4P板端公头 后锁面板式 PG9/M16 SW18T
M12B05-03-302-M16	M12防水 B-CODE 5P板端公头 后锁面板式 PG9/M16 SW18T
M12D02-03-302-M16	M12防水 D-CODE 2P板端公头 后锁面板式 PG9/M16 SW18T
M12D03-03-302-M16	M12防水 D-CODE 3P板端公头 后锁面板式 PG9/M16 SW18T
M12D04-03-302-M16	M12防水 D-CODE 4P板端公头 后锁面板式 PG9/M16 SW18T

Engagemnr firce	≤50N	Rated volage	2-5pin:60v 6-8PIN:30V	PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8PIN:2A				
Mechanical lifespan	≥500	Insulation resirance	≥1000MΩ				
IP rating	IP67	Conract resistangce	≤10MΩ				
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C				
A	HOUSING	PA66+GF	SPECIFY COLOR	1			
B	CONTACT	BRASS	GOLD PLATED	2~8			
C	OUTER CONTACT	BRASS	NICKL PLATED	1			
D	NUT	BRASS	NICKL PLATED	1			
E	O-RING	EPDM	BLACK	1			

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	NEW RELEASE		LINEAR	ANGLES	1:1			M12XXX-03-302-M16	ENDE05				
			0.0±0.25	X° REF±6°	APPROVED			TITLE M12后锁面板 公直头 ABD编码 PCB式 开孔M16					
			0.00±0.15	X° ±3°	DESIGNER								
			0.000±0.08	X° X' ±2°	DRAWN								
			UNIT: MM							REV	A0	SHEET	1/1