








| | | | | | | | | |
|--------------|------|------|------|------|------|------|------|---|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| pin位 | 2pin | 3pin | 4pin | 5pin | 6pin | 7pin | 8pin | |
| X 值 | 1.00 | 1.00 | 1.00 | 1.00 | 0.80 | 0.80 | 0.80 | |
| A-CODE 图形 | | | | | | | | |
| B-CODE 图形 | | | | | | | | |
| D-CODE 图形 | | | | | | | | |



Recommended Panel Cut-out



| | | | | | | | | |
|--|---|---|---|---|---|---|---|---|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|--|---|---|---|---|---|---|---|---|

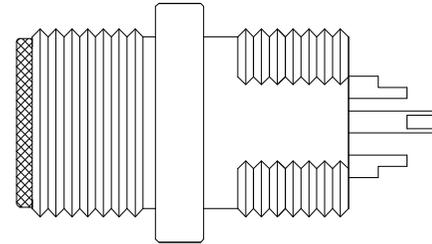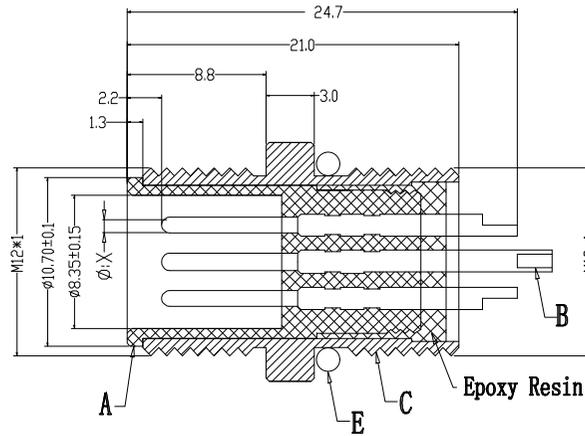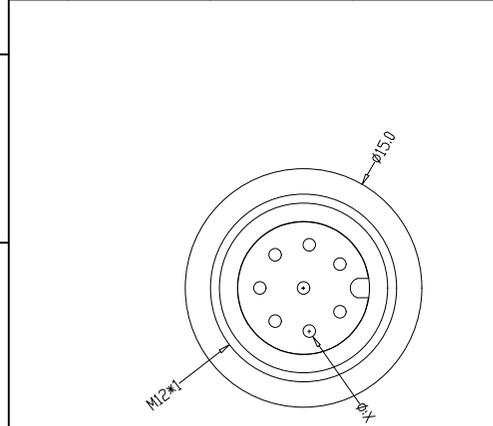

| | | | | | | | | |
|--|---|---|---|---|---|---|---|---|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|--|---|---|---|---|---|---|---|---|

| | | | |
|---------------------|------------|-----------------------|--------------------------|
| Engagement force | $\leq 50N$ | Rated voltage | 2-5pin:60V 6-8pin:30V |
| Disengagement force | $\geq 5N$ | Rated current | 2-5pin:4A 6-8pin:2A |
| Mechanical lifespan | ≥ 500 | Insulation resistance | $\geq 1000M \Omega$ |
| IP rating | IP67 | Contact resistance | $\leq 10m \Omega$ |
| Flammability | UL94 V-0 | Operation Temperature | -40° C~105° C |

| | PARTS | MATERIALS | TREATMENT | AMOUNT |
|---|---------------|-----------|---------------|--------|
| A | HOUSING | PA66+GF | SPECIFY COLOR | 1 |
| B | CONTACT | BRASS | GOLD PLATED | 2~8 |
| C | OUTER CONTACT | BRASS | NICKL PLATED | 1 |
| D | NUT | BRASS | NICKL PLATED | 1 |
| E | O-RING | EPDM | SPECIFY COLOR | 1 |
| F | | | | |

| | | | | | | | | |
|--|---|---|---|---|---|---|---|---|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|--|---|---|---|---|---|---|---|---|

| | | | | | | | | | | | | | | | | | |
|------|-----------------|------|----------|--------------------|-----------|----------|-------|------|----------|---------|------------------------------------|--|--|--|----------|--|--|
| REV. | REVISION RECORD | DATE | | GENERAL TOLERANCES | | SCALE | NAME | DATE | PART NO. | DWG NO. | TERMINAL&CONNECTORS | | | | | | |
| AO | NEW RELEASE | | | LINEAR | ANGLES | 1:1 | | | | | | | | | | | |
| | | | | 0.0±0.25 | X° REF±6° | APPROVED | | | | | | | | | | | |
| | | | | UNIT: MM | 0.00±0.15 | X° ±3° | | | | | | | | | DESIGNER | | |
| | | | SIZE: A4 | 0.000±0.08 | X° X' ±2° | DRAWN | TITLE | | | | | | | | | | |

| | | | | | | | | | | | |
|----------|--|-------------------|--|---------|--|--------|--|------------------------------------|--|--|--|
| PART NO. | | M12XXX-03-303-M12 | | DWG NO. | | ENDE05 | | TERMINAL&CONNECTORS | | | |
| TITLE | | M12后锁面板 公直头(圆盘) | | REV | | AO | | | | | |
| | | ABD编码 焊线式 开孔M12 | | SHEET | | 1/1 | | | | | |
| | | | | | | | | | | | |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|---|---|---|---|---|---|---|---|