

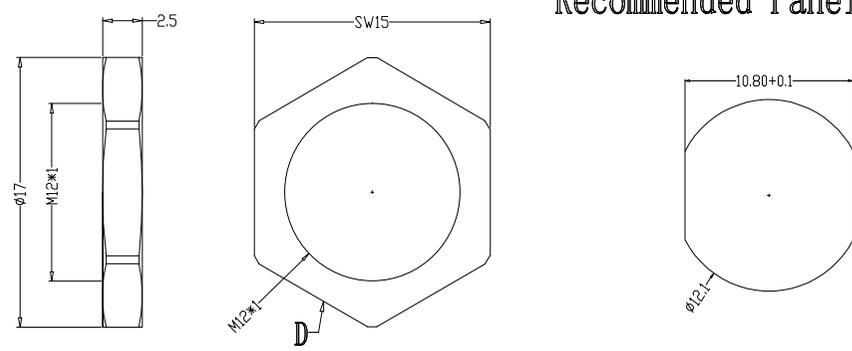
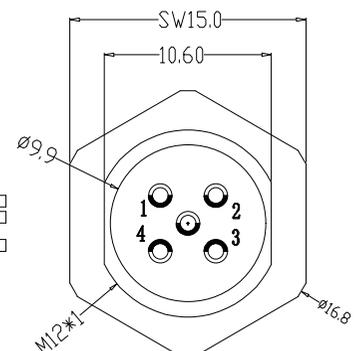
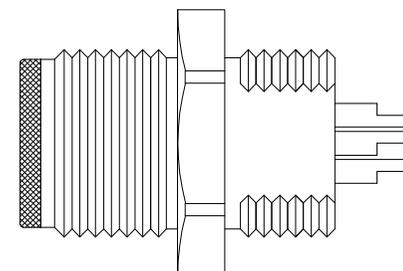


	1	2	3	4	5	6	7	8
pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin	
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80	
A-CODE 图形								
B-CODE 图形								
D-CODE 图形								

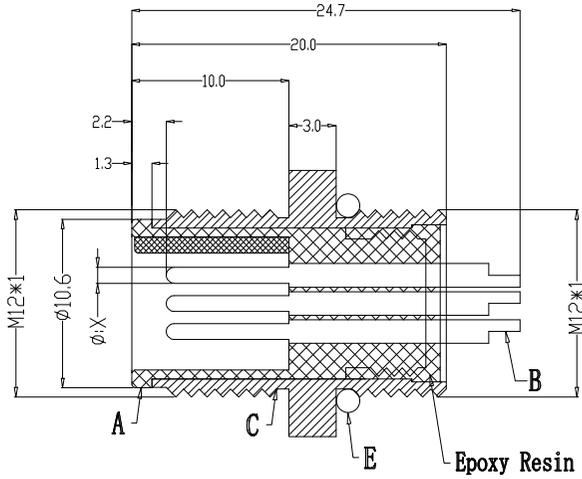

Recommended Panel Cut-out

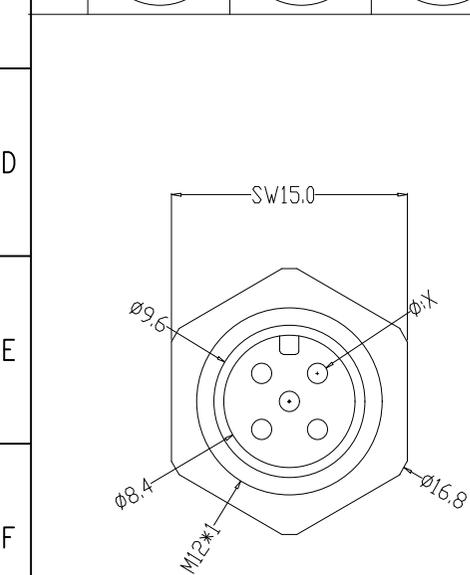

Engagement force	≤ 50N	Rated voltage	2-5pin: 60V 6-8pin: 30V
Disengagement force	≥ 5N	Rated current	2-5pin: 4A 6-8pin: 2A
Mechanical lifespan	≥ 500	Insulation resistance	≥ 1000M Ω
IP rating	IP67	Contact resistance	≤ 10m Ω
Flammability	UL94 V-0	Operation Temperature	-40° C ~ 105° C

	PARTS	MATERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRASS	GOLD PLATED	2~8
C	OUTER CONTACT	BRASS	NICKL PLATED	1
D	NUT	BRASS	NICKL PLATED	1
E	O-RING	EPDM	SPECIFY COLOR	1

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 <b>TERMINAL&amp;CONNECTORS</b>			
AO	NEW RELEASE			LINER	ANGLES	1:1								
				0.0±0.25	X° REF±6°	APPROVED								
				0.00±0.15	X° ±3°	DESIGNER								
			UNIT: MM						TITLE					
			SIZE: A4	0.000±0.08	X° X' ±2°	DRAWN			M12后锁面板 公直头 ABD编码 焊线式 开孔M12					
1	2	3	4	5	6	7	8	REV	AO	SHEET	1/1			