
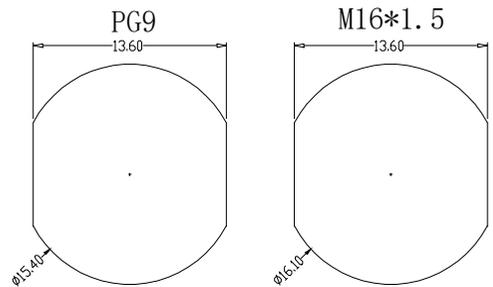


RoHS

组合图

Recommended Panel Cut-out

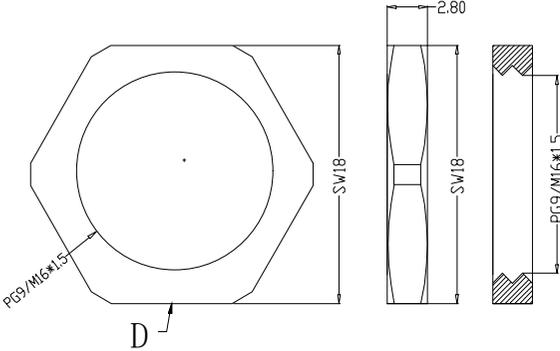

P/N	TITLE
M12A02-04-201-M16	M12防水 A-CODE 2P线端母头 前锁面板式PG9/M16 SW17T
M12A03-04-201-M16	M12防水 A-CODE 3P线端母头 前锁面板式PG9/M16 SW17T
M12A04-04-201-M16	M12防水 A-CODE 4P线端母头 前锁面板式PG9/M16 SW17T
M12A05-04-201-M16	M12防水 A-CODE 5P线端母头 前锁面板式PG9/M16 SW17T
M12A06-04-201-M16	M12防水 A-CODE 6P线端母头 前锁面板式PG9/M16 SW17T
M12A07-04-201-M16	M12防水 A-CODE 7P线端母头 前锁面板式PG9/M16 SW17T
M12A08-04-201-M16	M12防水 A-CODE 8P线端母头 前锁面板式PG9/M16 SW17T
M12B02-04-201-M16	M12防水 B-CODE 2P线端母头 前锁面板式PG9/M16 SW17T
M12B03-04-201-M16	M12防水 B-CODE 3P线端母头 前锁面板式PG9/M16 SW17T
M12B04-04-201-M16	M12防水 B-CODE 4P线端母头 前锁面板式PG9/M16 SW17T
M12B05-04-201-M16	M12防水 B-CODE 5P线端母头 前锁面板式PG9/M16 SW17T
M12D02-04-201-M16	M12防水 D-CODE 2P线端母头 前锁面板式PG9/M16 SW17T
M12D03-04-201-M16	M12防水 D-CODE 3P线端母头 前锁面板式PG9/M16 SW17T
M12D04-04-201-M16	M12防水 D-CODE 4P线端母头 前锁面板式PG9/M16 SW17T

Engagemnr firce	≤50N	Rated volage	2-5pin:60v 6-8PIN:30V	A	HOUSING	PA66+GF	SPECIFY COLOR	1
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8PIN:2A	B	CONTACT	BRASS	GOLD PLATED	2~8
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	C	OUTER CONTACT	BRASS	NICKL PLATED	1
IP rating	IP67	Conract resistangce	≤10MΩ	D	NUT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	E	O-RING	EPDM	SPECIFY COLOR	2

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	NEW RELEASE		LINEAR	ANGLES	1:1			M12XXX-04-201-M16	ENDE05				
			0.0±0.25	X° REF±6°	APPROVED			TITLE M12 2~8P线端母头 前锁面板式PG9/M16 SW17T					
			0.00±0.15	X° ±3°	DESIGNER								
			0.000±0.08	X° X' ±2°	DRAWN								
			UNIT: MM							REV	A0	SHEET	1/1