

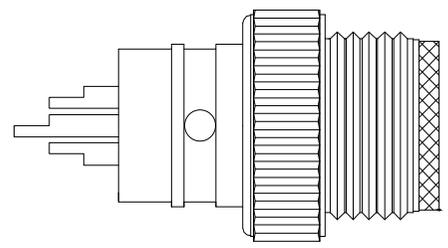

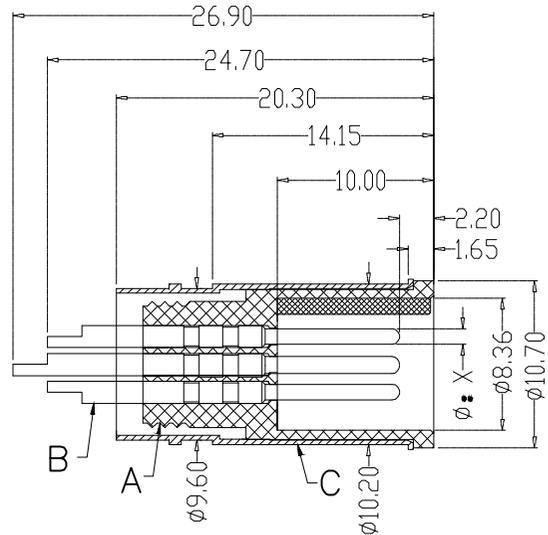



RoHS

Pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
X值	1.00	1.00	1.00	1.00	0.80	0.80	0.80
A-CODE 图形							
B-CODE 图形							
D-CODE 图形							



组合图

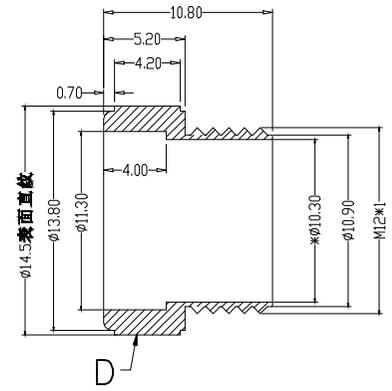

Engagemn frice	≤50N	Rated vol age	2-5Pi n: 60v 6-8Pi n: 30v	PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	/ 5N	Rated current	2-5Pi n: 4A 6-8Pi n: 2A				
Mechanical lifespan	/ 500	Insulation resistance	/ 1000MΩ				
IPrating	IP67	Conract resi stance	≤10MΩ				
Flammability	UL94 V-0	Operation Temperature	-40°C ~105°C				
A	HOUSING	PA66+GF	SPECIFY COLOR	1			
B	CONTACT	BRASS	GOLD PLATED	2-8			
C	SHIELD	BRASS	NICKL PLATED	1			
D	NUT	BRASS	NICKL PLATED	1			

REVISION RECORD		DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	NEW RELEASE		LINEAR	ANGLES	1:1			M12XXX-07-068	ENDE05				
			0.0±0.25	X° REF±6°	APPROVED								
			0.00±0.15	X° ±3°	DESIGNER								
			0.000±0.08	X° X' ±2°	DRAWN								
TITLE								M12成型式防水连接器 2~8芯 ABD编码 焊线式 公头 屏蔽款+10.8L直纹螺丝		REV	A0	SHEET	1/1