

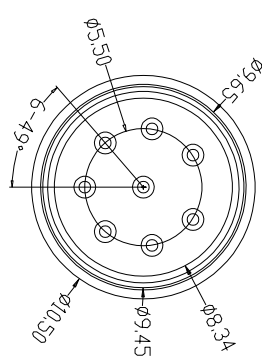
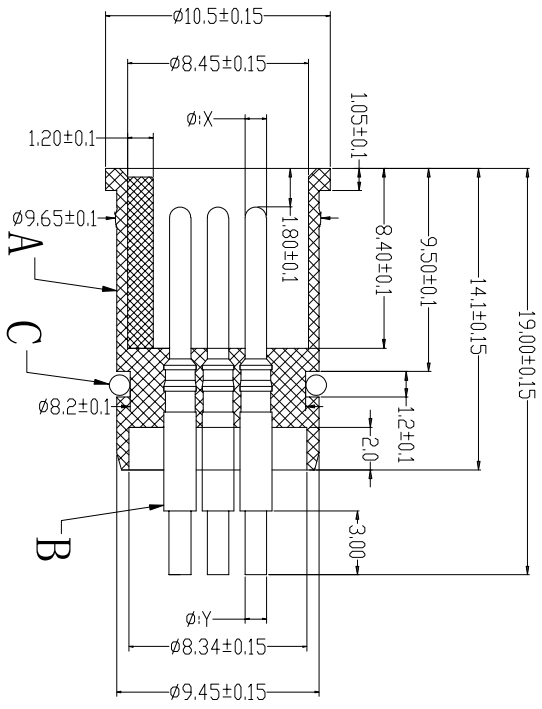




The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements


PIN位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80



2PIN~5PIN



组合图

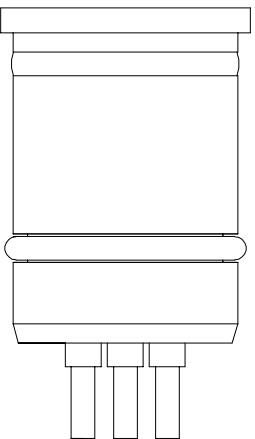

P/N	TITLE
M12A02-07-072	M12防水 A-CODE 2P板端公头 D款+19L
M12A03-07-072	M12防水 A-CODE 3P板端公头 D款+19L
M12A04-07-072	M12防水 A-CODE 4P板端公头 D款+19L
M12A05-07-072	M12防水 A-CODE 5P板端公头 D款+19L
M12A06-07-072	M12防水 A-CODE 6P板端公头 D款+19L
M12A07-07-072	M12防水 A-CODE 7P板端公头 D款+19L
M12A08-07-072	M12防水 A-CODE 8P板端公头 D款+19L
M12B02-07-072	M12防水 B-CODE 2P板端公头 D款+19L
M12B03-07-072	M12防水 B-CODE 3P板端公头 D款+19L
M12B04-07-072	M12防水 B-CODE 4P板端公头 D款+19L
M12B05-07-072	M12防水 B-CODE 5P板端公头 D款+19L
M12D02-07-072	M12防水 D-CODE 2P板端公头 D款+19L
M12D03-07-072	M12防水 D-CODE 3P板端公头 D款+19L
M12D04-07-072	M12防水 D-CODE 4P板端公头 D款+19L

Engagement force	≤50N	Rated voltage	2-5pin: 60V 6-8pin: 30V	PARTS	MATERIALS	TREATMENT	AMOUNT	
Disengagement force	≥5N	Rated current	2-5pin: 4A 6-8pin: 2A					
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	A	HOUSING	PA66+GF	SPECIFY COLOR	1
IP rating	IP67/IP68	Contract resistance	≤10MΩ	B	CONTACT	BRASS	GOLD PLATED	2*8
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	C	O-RING	EPDM	BLACK	1

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 Wanlian Technology Co., Ltd
AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	1:1	APPROVED		M12XXX-07-072	ENDE05	
			0.0±0.35	X'REF±6°		DESIGNER				REV: AO
			UNIT:mm	X'±3'		DRAWN		TITLE:		SHEET: 1/1
			SIZE: A4	X'X' ±2'				M12防水 2~8P板端公头 D款19L		