

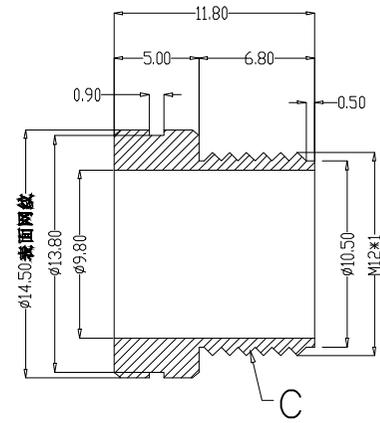
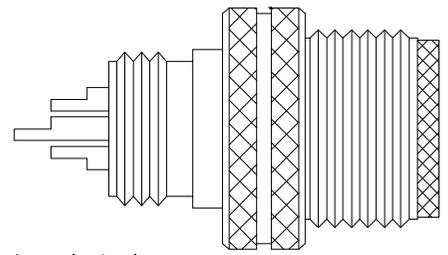

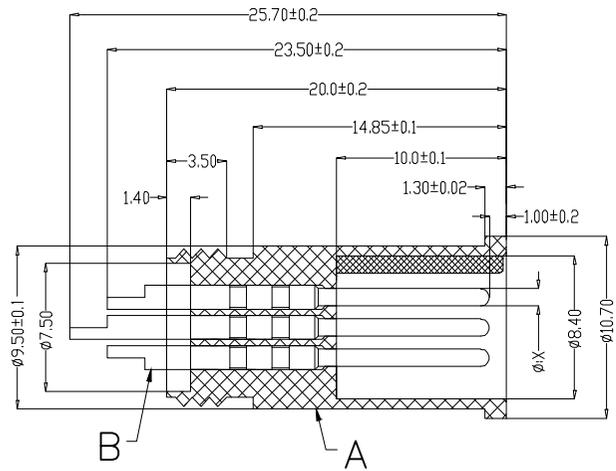
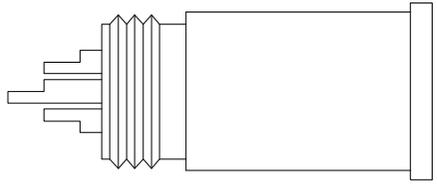


	1	2	3	4	5	6	7	8
Pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin	
X值	1.00	1.00	1.00	1.00	0.80	0.80	0.80	
A-CODE 图形								
B-CODE 图形								
D-CODE 图形								

RoHS



组合图

Engagemer force	≤50N	Rated voltage	2-5Pin: 60V 6-8Pin: 30V	PARTS	MATERIALS	TREATMENT	AMOUNT	
Disengagement force	/ 5N	Rated current	2-5Pin: 4A 6-8Pin: 2A					
Mechanical lifespan	/ 500	Insulation resistance	/ 1000MΩ					
IP rating	IP67	Contact resistance	≤10mΩ					
Flammability	UL94 V-0	Operation Temperature	-40°C ~105°C					
				A	HOUSING	PA66+GF	SPECIFY COLOR	1
				B	CONTACT	BRASS	GOLD PLATED	2-8
				C	NUT	BRASS	NICKEL PLATED	1
				D				
				E				

REVISION RECORD		DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	NEW RELEASE		LINEAR	ANGLES	1:1			M12XXX-07-093	ENDE05				
			0.0±0.25	X° REF±6°	APPROVED								
			0.00±0.15	X° ±3°	DESIGNER								
			0.000±0.08	X° X' ±2°	DRAWN								
TITLE								M12成型式防水连接器 2~8芯 ABD编码 焊线式 公头 非屏蔽款+11.8L双网纹螺丝					
1	2	3	4	5	6	7	8	REV	A0	SHEET	1/1		