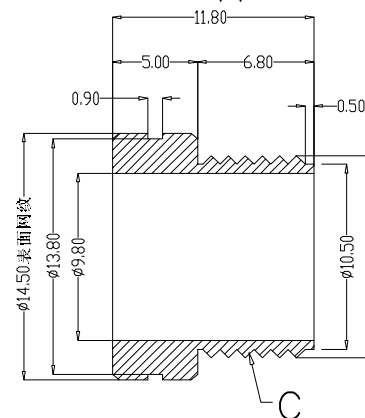
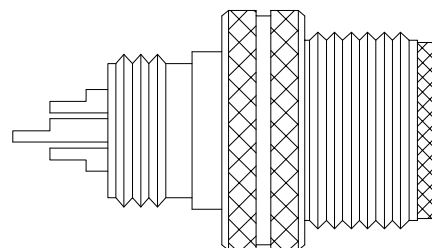

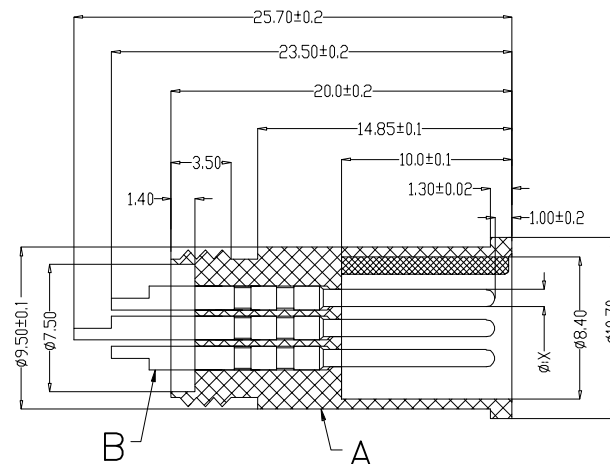
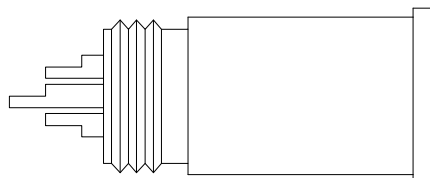


组合图

Engagemnr firce	≤50N	Rated volage	2-5PI n: 60v 6-8PI n: 30v	A B C D E	PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	/ 5N	Rated current	2-5PI n: 4A 6-8PI n: 2A		HOUSING	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	/ 500	Insulation resisrance	/ 1000MΩ		CONTACT	BRASS	GOLD PLATED	2~8
IPrating	I P67/P68	Conract resi stangoe	≤10MΩ		NUT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40°C ~105°C					

万连科技
WanLian Technology Co., Ltd.