

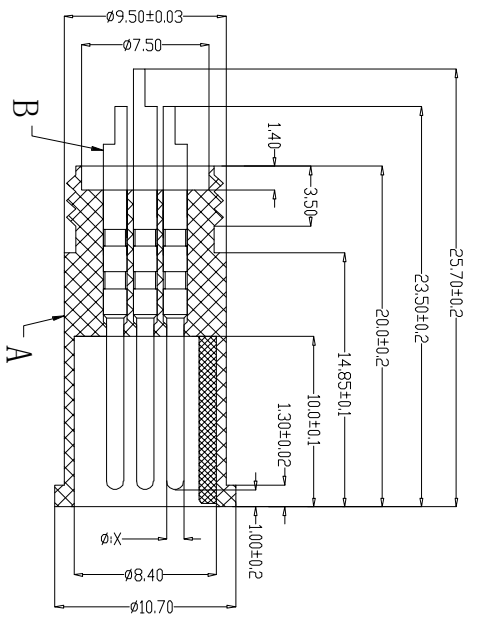
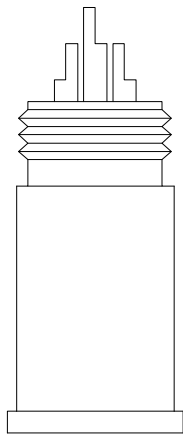





The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

PIN位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80

A-CODE 图形							
B-CODE 图形							
D-CODE 图形							



组合图

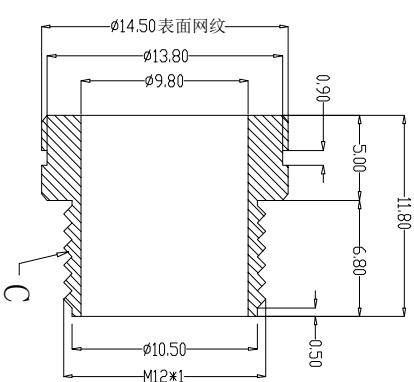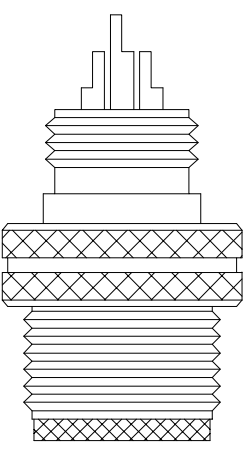

P/N	TITLE
M12A02-07-093	M12防水 A-CODE 2P线端公头B款+11.8L 双网纹螺丝
M12A03-07-093	M12防水 A-CODE 3P线端公头B款+11.8L 双网纹螺丝
M12A04-07-093	M12防水 A-CODE 4P线端公头B款+11.8L 双网纹螺丝
M12A05-07-093	M12防水 A-CODE 5P线端公头B款+11.8L 双网纹螺丝
M12A06-07-093	M12防水 A-CODE 6P线端公头B款+11.8L 双网纹螺丝
M12A07-07-093	M12防水 A-CODE 7P线端公头B款+11.8L 双网纹螺丝
M12A08-07-093	M12防水 A-CODE 8P线端公头B款+11.8L 双网纹螺丝
M12B02-07-093	M12防水 B-CODE 2P线端公头B款+11.8L 双网纹螺丝
M12B03-07-093	M12防水 B-CODE 3P线端公头B款+11.8L 双网纹螺丝
M12B04-07-093	M12防水 B-CODE 4P线端公头B款+11.8L 双网纹螺丝
M12B05-07-093	M12防水 B-CODE 5P线端公头B款+11.8L 双网纹螺丝
M12D02-07-093	M12防水 D-CODE 2P线端公头B款+11.8L 双网纹螺丝
M12D03-07-093	M12防水 D-CODE 3P线端公头B款+11.8L 双网纹螺丝
M12D04-07-093	M12防水 D-CODE 4P线端公头B款+11.8L 双网纹螺丝

Engagement force	≤50N	Rated voltage	2-5pin:60V 6-8pin:30V	PARTS	HOUSING	MATERIALS	TREATMENT	AMOUNT
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8pin:2A		A	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ		B	BRASS	GOLD PLATED	2*8
IP rating	IP67/IP68	Contract resistance	≤10MΩ		C	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C		D			

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:
AO	NEW RELEASE	21.11.17	LINEAR	1:1			M12XXX-07-093	ENDE05
			ANGLES	X'REF±6°	APPROVED			
			UNIT:mm	X±3'	DESIGNER		TITLE:	
			SIZE:A4	X'X'±2'	DRAWN		M12防水 2~8P线端公头 B款+11.8L 双网纹螺丝	



Wanlian Technology Co., Ltd

REV: AO SHEET: 1/1