


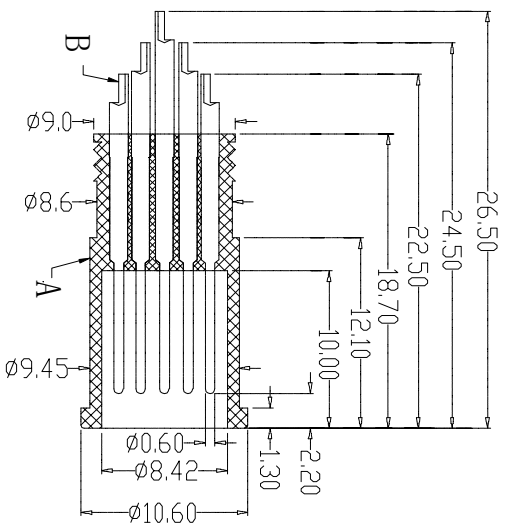




The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements



9pin	10pin	11pin	12pin	13pin	14pin	15pin	16pin	17pin
------	-------	-------	-------	-------	-------	-------	-------	-------

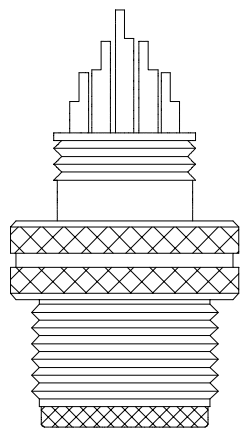

组合图

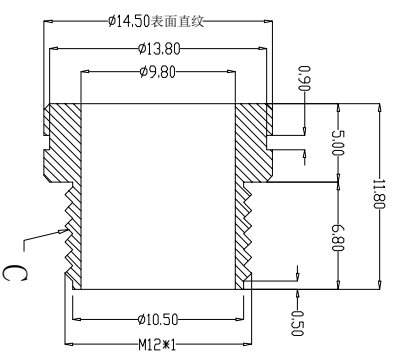

P/N	TITLE
-----	-------

M12A09-07-094	M12防水 A-CODE 9P 线端公头 C款+11.8L 双网纹螺丝
M12A10-07-094	M12防水 A-CODE 10P 线端公头 C款+11.8L 双网纹螺丝
M12A11-07-094	M12防水 A-CODE 11P 线端公头 C款+11.8L 双网纹螺丝
M12A12-07-094	M12防水 A-CODE 12P 线端公头 C款+11.8L 双网纹螺丝
M12A13-07-094	M12防水 A-CODE 13P 线端公头 C款+11.8L 双网纹螺丝
M12A14-07-094	M12防水 A-CODE 14P 线端公头 C款+11.8L 双网纹螺丝
M12A15-07-094	M12防水 A-CODE 15P 线端公头 C款+11.8L 双网纹螺丝
M12A16-07-094	M12防水 A-CODE 16P 线端公头 C款+11.8L 双网纹螺丝
M12A17-07-094	M12防水 A-CODE 17P 线端公头 C款+11.8L 双网纹螺丝

Engagement force	≤50N	Rated voltage	30V	PARTS	MATERIALS	TREATMENT	AMOUNT
Disengagement force	≥10N	Rated current	1.5A	A	HOUSING	PA66+GF	SPECIFY COLOR
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	B	CONTACT	BRASS	GOLD PLATED
IP rating	IP67/IP68	Contract resistance	≤10MΩ	C	NUT	ZINC ALLOY	NICKL. PLATED
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	D			
				E			

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	1:1			M12XXX-07-094	ENDE05	
			0.0±0.35	X'REF±6°	APPROVED					
			0.00±0.25	X'±3'	DESIGNER					
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN				REV: AO
										SHEET: 1/1

1 2 3 4 5 6 7 8