
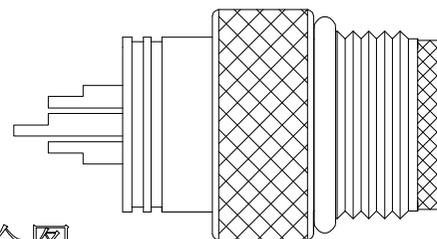

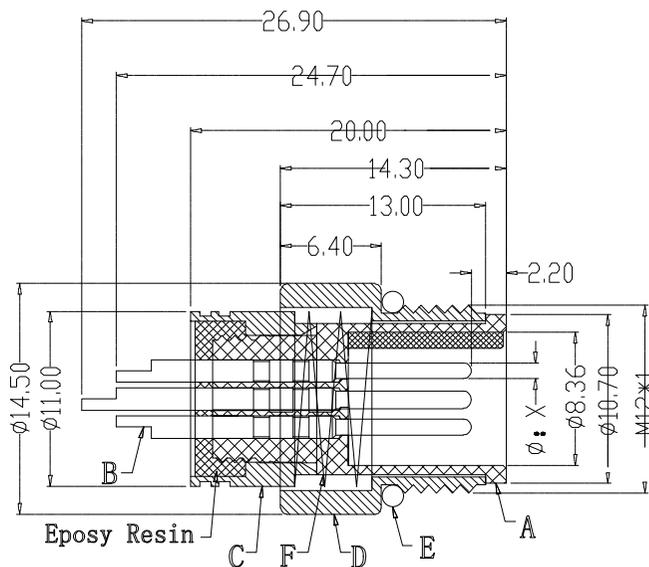


	1	2	3	4	5	6	7	8
PIN位	2pin	3pin	4pin	5pin	6pin	7pin	8pin	
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80	
A-CODE 图形								
B-CODE 图形								
D-CODE 图形								



组合图

Engagemnr firce	≤50N	Rated volage	2-5pin:60v 6-8pin:30v	PARTS	MARERIALS	TREATMENT	AMOUNT	
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8pin:2A					
Mechanical lifespan	≥500	Insulation resirance	≥1000MΩ	A	HOUSING	PA66+GF	SPECIFY COLOR	1
IP rating	IP67	Conract resistangce	≤10MΩ	B	CONTACT	BRASS	GOLD PLATED	2~8
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	C	SHIELD	BRASS	NICKL PLATED	1
				D	NUT	BRASS	NICKL PLATED	1
				E	O-RING	EPDM	BLACK	1
				F	SPRING	SS	BLACK	1

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 JCTC ® TERMINAL&CONNECTORS			
A0	NEW RELEASE		LINEAR	ANGLES	1:1			M12XXX-07-109	ENDE05				
			0.0±0.25	X° REF±6°	APPROVED					TITLE M12成型式防水连接器 2~8芯 ABD编码 焊 线式公头 屏蔽款+13L弹簧网纹螺丝			
			0.00±0.15	X° ±3°	DESIGNER								
			UNIT: MM	0.00±0.08	X° X' ±2°	DRAWN				REV	A0	SHEET	1/1

