
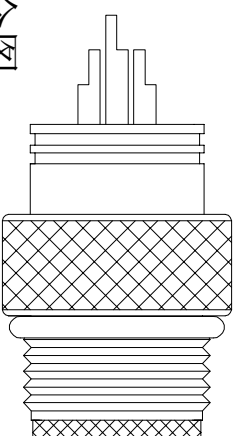

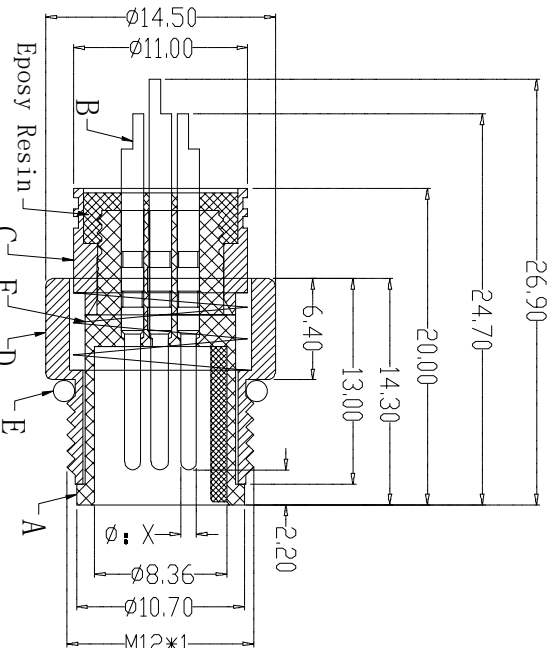


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

PIN位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80

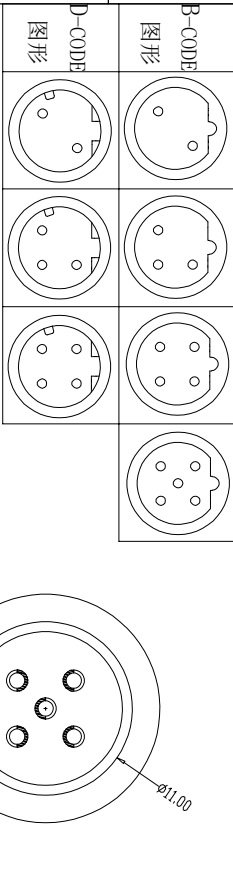

组合图

P/N	TITLE
M12A02-07-109	M12防水 A-CODE 2P线端公头 屏蔽款+弹簧网纹螺丝
M12A03-07-109	M12防水 A-CODE 3P线端公头 屏蔽款+弹簧网纹螺丝
M12A04-07-109	M12防水 A-CODE 4P线端公头 屏蔽款+弹簧网纹螺丝
M12A05-07-109	M12防水 A-CODE 5P线端公头 屏蔽款+弹簧网纹螺丝
M12A06-07-109	M12防水 A-CODE 6P线端公头 屏蔽款+弹簧网纹螺丝
M12A07-07-109	M12防水 A-CODE 7P线端公头 屏蔽款+弹簧网纹螺丝
M12A08-07-109	M12防水 A-CODE 8P线端公头 屏蔽款+弹簧网纹螺丝
M12B02-07-109	M12防水 B-CODE 2P线端公头 屏蔽款+弹簧网纹螺丝
M12B03-07-109	M12防水 B-CODE 3P线端公头 屏蔽款+弹簧网纹螺丝
M12B04-07-109	M12防水 B-CODE 4P线端公头 屏蔽款+弹簧网纹螺丝
M12B05-07-109	M12防水 B-CODE 5P线端公头 屏蔽款+弹簧网纹螺丝
M12D02-07-109	M12防水 D-CODE 2P线端公头 屏蔽款+弹簧网纹螺丝
M12D03-07-109	M12防水 D-CODE 3P线端公头 屏蔽款+弹簧网纹螺丝
M12D04-07-109	M12防水 D-CODE 4P线端公头 屏蔽款+弹簧网纹螺丝

Engagement force	≤50N	Rated voltage	2-5pin:60v 6-8pin:30v
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8pin:2A
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ
IP rating	IP67/IP68	Contract resistance	≤10MΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

PARTS	MATERIALS	TREATMENT	AMOUNT
A HOUSING	PA66+GF	SPECIFY COLOR	1
B CONTACT	BRASS	GOLD PLATED	2~8
C SHIELD	BRASS	NICKL PLATED	1
D NUT	BRASS	NICKL PLATED	1
E O-RING	EPDM	BLACK	1
F SPRING	SS	BLACK	1

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO.:	DWG.NO.:
AO	NEW RELEASE	21.11.17	LINEAR 0.0±0.35 ANGLES X'REF±6°	1:1			M12XXX-07-109	ENDE05
			UNIT:mm 0.00±0.25 SIZE:A4 0.000±0.10	APPROVED				
				DESIGNER				
				DRAWN				
							TITLE: M12防水 2~8P线端公头 屏蔽款+弹簧网纹螺丝	
								REV: AO
								SHEET: 1/1



Wanlian Technology Co., Ltd