
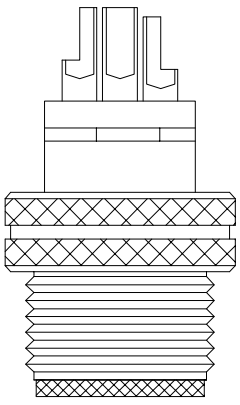

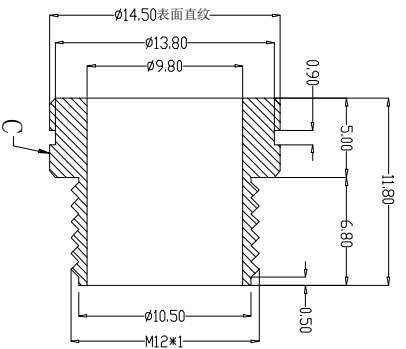

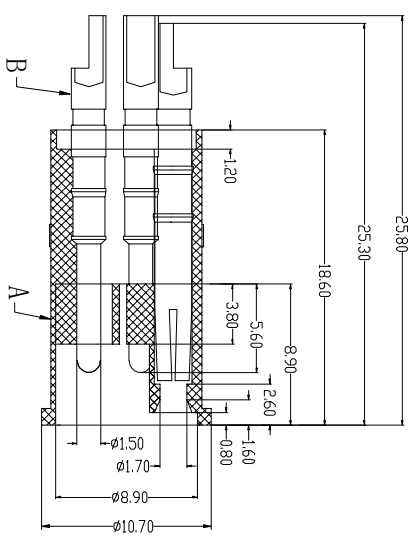
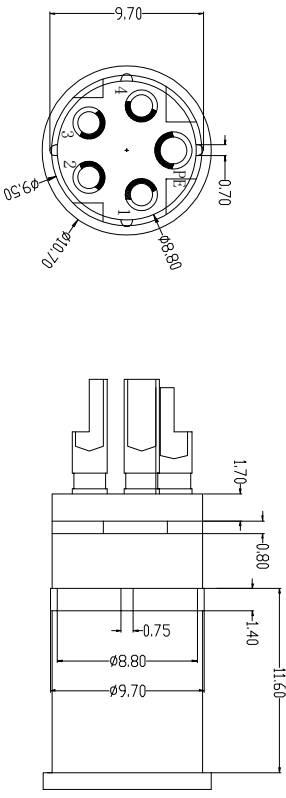


The product using material and processing technical standard control requirements

"WL-PZ-001"HSF technical standard control requirements

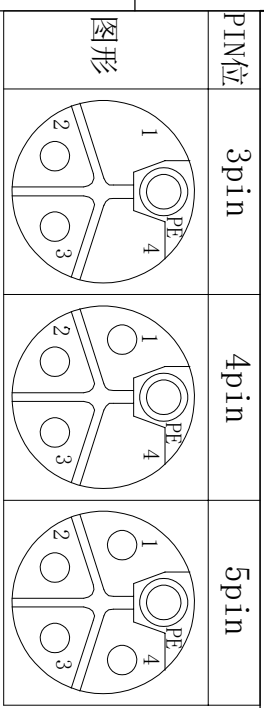

组合图

P/N	TITLE
M12103-07-117	M12防水 L-CODE 3P线端公头 11.8L双网纹螺丝
M12104-07-117	M12防水 L-CODE 4P线端公头 11.8L双网纹螺丝
M12105-07-117	M12防水 L-CODE 5P线端公头 11.8L双网纹螺丝

Engagement force	≤50N	Rated voltage	63v	PARTS	MATERIALS	TREATMENT	AMOUNT
Disengagement force	≥5N	Rated current	16A				
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	B CONTACT	BRONZE	GOLD PLATED	3*5
IP rating	IP67/IP68	Contract resistance	≤10MΩ	C NUT	BRASS	NICKL PLATED	1
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	D			
				E			

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	Wanlian Technology Co., Ltd	
AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	1:1			M12XXX-07-117	ENDE05	万链科技	
			0.0±0.35	X'REF±6°	APPROVED					REV: AO	SHEET: 1/1
			UNIT:mm	X'±3'	DESIGNER			TITLE:			
			SIZE:A4	X'X'±2'	DRAWN			M12防水 3~5P线端母头 L-CODE 11.8L双网纹螺丝			