


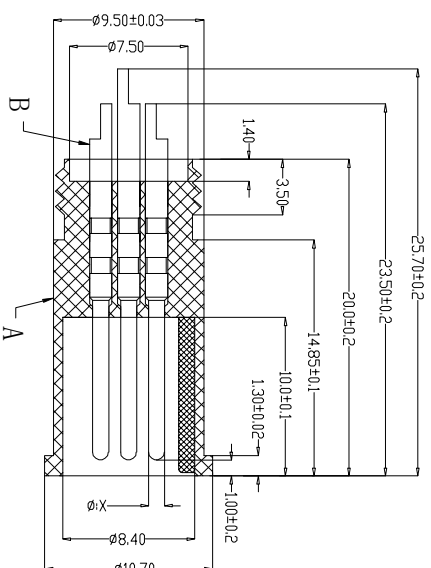
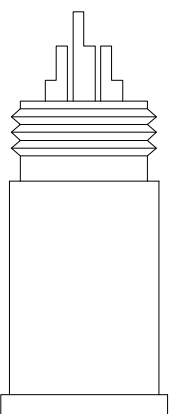


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements






PIN位	2pin	3pin	4pin	5pin	6pin	7pin	8pin
X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80

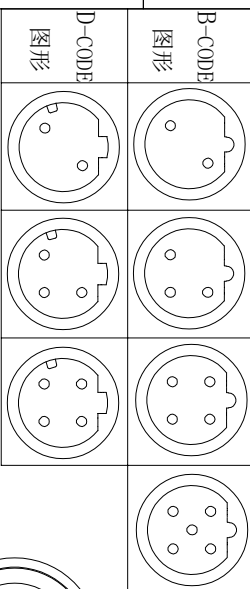

P/N TITLE

M12A02-07-119	M12防水 A-CODE 2P线端公头 B款+11.8L 直纹螺丝
M12A03-07-119	M12防水 A-CODE 3P线端公头 B款+11.8L 直纹螺丝
M12A04-07-119	M12防水 A-CODE 4P线端公头 B款+11.8L 直纹螺丝
M12A05-07-119	M12防水 A-CODE 5P线端公头 B款+11.8L 直纹螺丝
M12A06-07-119	M12防水 A-CODE 6P线端公头 B款+11.8L 直纹螺丝
M12A07-07-119	M12防水 A-CODE 7P线端公头 B款+11.8L 直纹螺丝
M12A08-07-119	M12防水 A-CODE 8P线端公头 B款+11.8L 直纹螺丝
M12B02-07-119	M12防水 B-CODE 2P线端公头 B款+11.8L 直纹螺丝
M12B03-07-119	M12防水 B-CODE 3P线端公头 B款+11.8L 直纹螺丝
M12B04-07-119	M12防水 B-CODE 4P线端公头 B款+11.8L 直纹螺丝
M12B05-07-119	M12防水 B-CODE 5P线端公头 B款+11.8L 直纹螺丝
M12D02-07-119	M12防水 D-CODE 2P线端公头 B款+11.8L 直纹螺丝
M12D03-07-119	M12防水 D-CODE 3P线端公头 B款+11.8L 直纹螺丝
M12D04-07-119	M12防水 D-CODE 4P线端公头 B款+11.8L 直纹螺丝

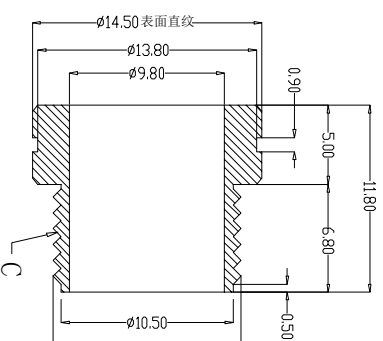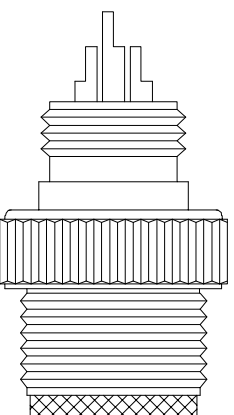

组合图

Engagement force	$\leq 50N$	Rated voltage	2-5pin: 60V 6-8pin: 30V	PARTS	MATERIALS	TREATMENT	AMOUNT
Disengagement force	$\geq 5N$	Rated current	2-5pin: 4A 6-8pin: 2A	A	PA66+GF	SPECIFY COLOR	1
Mechanical lifespan	$\geq 500$	Insulation resistance	$\geq 1000M\Omega$	B	CONTACT	GOLD PLATED	2*8
IP rating	IP67/IP68	Contract resistance	$\leq 10M\Omega$	C	NUT	BRASS	1
Flammability	UL94 V-0	Operation Temperature	-40° C ~ 105° C	D		NICKL PLATED	
				E			

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:
AO	NEW RELEASE	21.11.17	LINEAR	1:1			M12XXX-07-119	ENDE05

UNIT:mm	0.00±0.25	X'±3°	DESIGNER	TITLE:	M12防水 2~8P线端公头B款+11.8L 直纹螺丝	REV: AO	SHEET: 1/1
SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN				

