The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

pin位	3pin	4pin	5pin	6pin
X值	1.00mm	1.00mm	0.76mm	0.76mm
图形				



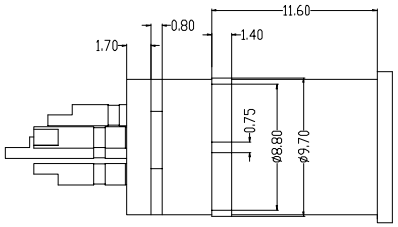

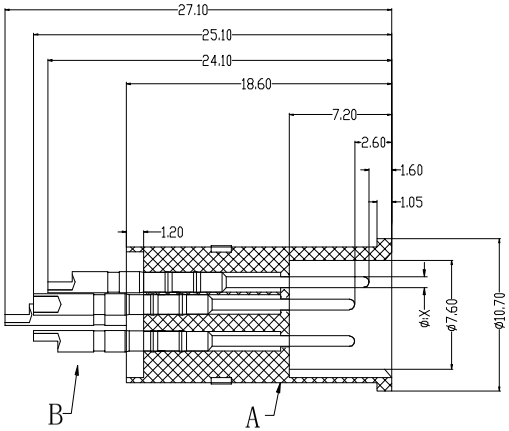



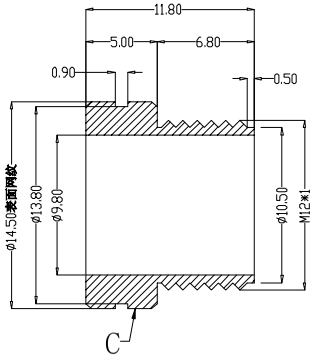



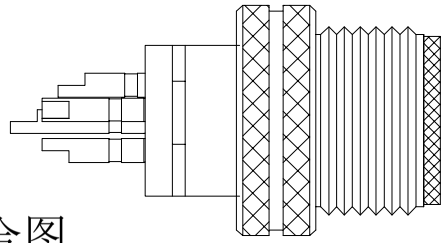

组合图

P/N	TITLE
M12S03-07-123	M12防水 3P线端公头 屏蔽 C-CODE+11.8L网纹螺丝
M12S04-07-123	M12防水 4P线端公头 屏蔽 C-CODE+11.8L网纹螺丝
M12S05-07-123	M12防水 5P线端公头 屏蔽 C-CODE+11.8L网纹螺丝
M12S06-07-123	M12防水 6P线端公头 屏蔽 C-CODE+11.8L网纹螺丝

Engagemenr firce	≤50N	Rated volage	3-4pin:250v 5PIN:60V 6PIN:30V
Disengagement force	≥10N	Rated current	3-4pin:4A 5-6PIN:2A
Mechanical lifespan	≥500	Insulation resisrance	≥1000MΩ
IP rating	IP67/IP68	Conract resistangce	≤10MΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

	PARTS	MARERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRONZE	GOLD PLATED	3~6
C	NUT	BRASS	NICKL PLATED	1
D				
E				

REV.	REVISION RECORD	DATE
A0	NEW RELEASE	21.11.17

UNIT: mm

SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.35	X°REF±6°
0.00±0.25	X°±3°
0.000±0.10	X°X' ±2°

SCALE: 1:1	NAME	DATE
APPROVED		
DESIGNER		
DRAWN		

PART.NO: M12XXX-07-123

DWG.NO: ENDE05

万连科技 WanLian Technology Co., Ltd

TITLE: M12防水 3~6P线端公头 C-CODE+11.8L双网纹螺丝

REV: A0

SHEET: 1/1