

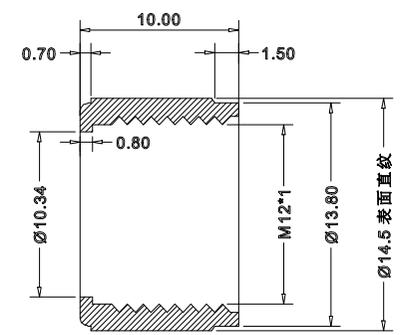
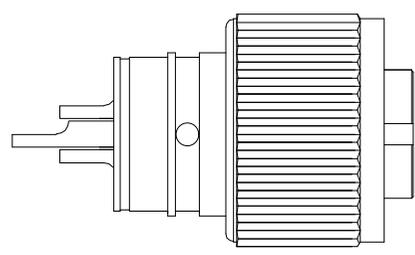

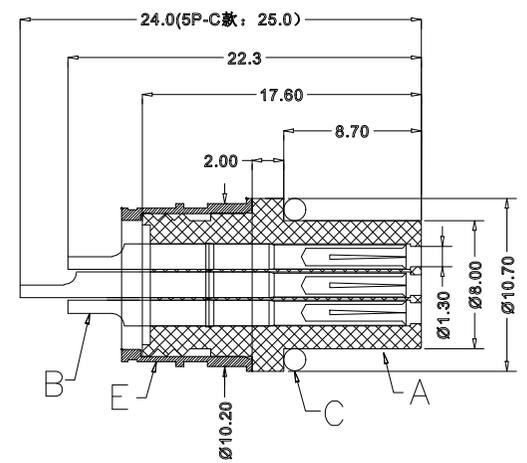


RoHS



组合图

Engagemnr force	≤50N	Rated volage	2-5Pi n: 60v 6-8Pi n: 30v	PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	/ 5N	Rated current	2-5Pi n: 4A 6-8Pi n: 2A				
Mechanical lifespan	/ 500	Insulation resistance	/ 1000MΩ				
IP rating	IP67	Conract resistangce	≤10MΩ				
Flammability	UL94 V-0	Operation Temperature	-40°C ~105°C				
A	HOUSING	PA66+GF	SPECIFY COLOR	1			
B	CONTACT	BRASS	GOLD PLATED	2~8			
C	OUTER CONTACT	BRASS	NI CKL PLATED	1			
D	NUT	BRASS	NI CKL PLATED	1			
F	O-RING	FPDM	BLACK	1			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS				
A0	NEW RELEASE			LINEAR	ANGLES	1:1									
				0.0±0.25	X° REF±6°	APPROVED									
				UNIT: MM	0.00±0.15	X° ±3°					DESIGNER				
			SIZE: A4	0.000±0.08	X° X' ±2°	DRAWN	TITLE								
									M12成型式防水连接器 2~8芯 ABD编码 焊线式 母头 屏蔽款+10L直纹螺母			REV	A0	SHEET	1/1