


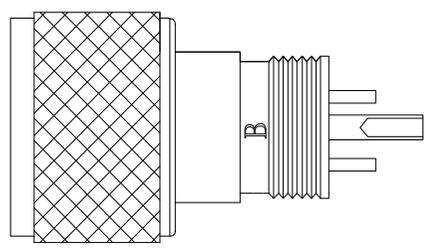
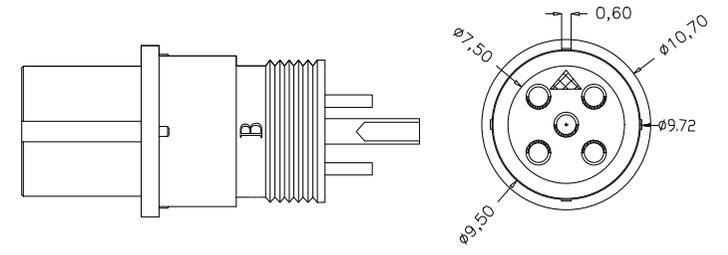
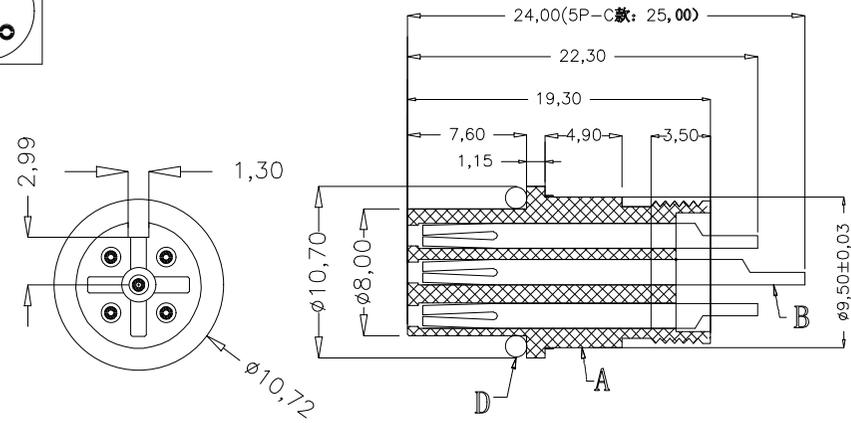


RoHS

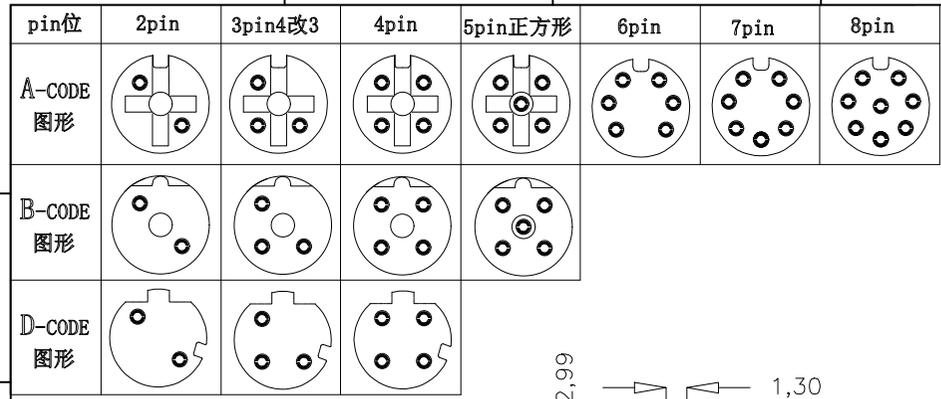

组合图

Engagemnr firce	≤50N	Rated volage	2-5pin:60v 6-8pin:30v	PARTS	MARERIALS	TREATMENT	AMOUNT
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8pin:2A				
Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ				
IP rating	IP67	Conract resistangce	≤10MΩ				
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C				
A	HOUSING	PA66+GF	SPECIFY COLOR	1			
B	CONTACT	BRASS	GOLD PLATED	2~8			
C	NUT	BRASS	NICKL PLATED	1			
D	O-RING	EPDM	GREEN	1			

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 JCTC ® TERMINAL&CONNECTORS
A0	NEW RELEASE		LINEAR	ANGLES	1:1			M12XXX-08-085	ENDE05	
			0.0±0.25	X° REF±6°	APPROVED					
			0.00±0.15	X° ±3°	DESIGNER			TITLE		
			SIZE: A4	0.000±0.08	DRAWN			M12成型式防水连接器 2~8芯 ABD编码 焊线式 母头 非屏蔽款+10.5L网纹螺母		
REV	A0	SHEET							1/1	