



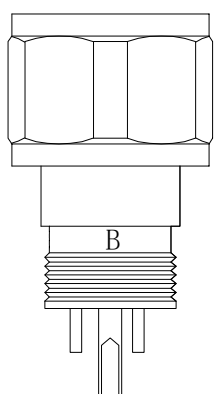

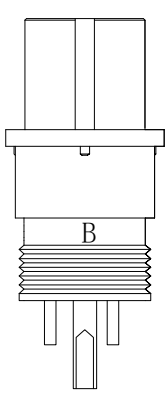
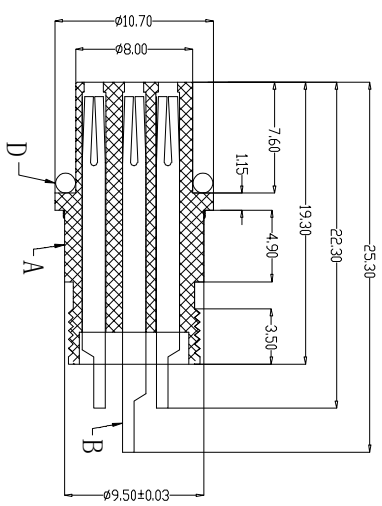

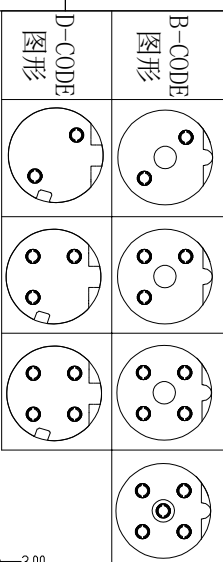


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

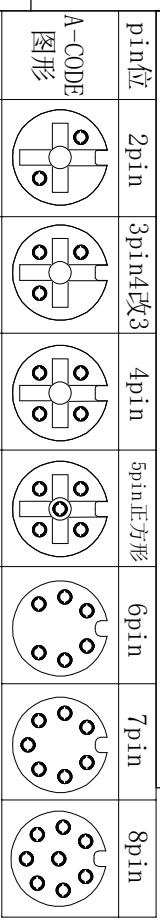

组合图

P/N	TITLE	Engagement force	Rated voltage	2-5pin: 60V 6-8pin: 30V	PARTS	MATERIALS	TREATMENT	AMOUNT
M12A02-08-087	M12防水 A-CODE 2P线端母头 B款+10.4L六角螺母	$\geq 50N$	Rated voltage	2-5pin: 60V 6-8pin: 30V	A HOUSING	PA66+GF	SPECIFY COLOR	1
M12A03-08-087	M12防水 A-CODE 3P线端母头 B款+10.4L六角螺母	$\geq 5N$	Rated current	2-5pin: 4A 6-8pin: 2A	B CONTACT	BRASS	GOLD PLATED	2*8
M12A04-08-087	M12防水 A-CODE 4P线端母头 B款+10.4L六角螺母	$\geq 500$	Insulation resistance	$\geq 1000M\Omega$	C NUT	BRASS	NICKL PLATED	1
M12A05-08-087	M12防水 A-CODE 5P线端母头 B款+10.4L六角螺母	Contract resistance	Contract resistance	$\leq 10M\Omega$	D O-RING	EPDM	BLACK	1
M12A06-08-087	M12防水 A-CODE 6P线端母头 B款+10.4L六角螺母	Operation Temperature	Operation Temperature	-40° C~105° C	E			
M12A07-08-087	M12防水 A-CODE 7P线端母头 B款+10.4L六角螺母							
M12A08-08-087	M12防水 A-CODE 8P线端母头 B款+10.4L六角螺母							
M12B02-08-087	M12防水 B-CODE 2P线端母头 B款+10.4L六角螺母							
M12B03-08-087	M12防水 B-CODE 3P线端母头 B款+10.4L六角螺母							
M12B04-08-087	M12防水 B-CODE 4P线端母头 B款+10.4L六角螺母							
M12B05-08-087	M12防水 B-CODE 5P线端母头 B款+10.4L六角螺母							
M12D02-08-087	M12防水 D-CODE 2P线端母头 B款+10.4L六角螺母							
M12D03-08-087	M12防水 D-CODE 3P线端母头 B款+10.4L六角螺母							
M12D04-08-087	M12防水 D-CODE 4P线端母头 B款+10.4L六角螺母							

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO.:	DWG.NO.:
AO	NEW RELEASE	21.11.17	LINEAR	1:1			M12XXX-08-087	ENDE05
			ANGLES					
			X' REF ±6°	APPROVED				
			0.0±0.35	DESIGNER				
			X' ±3°	DRAWN				
			UNIT: mm					
			0.00±0.25					
			SIZE: A4					
			0.000±0.10					
1								
2								
3								
4								
5								
6								
7								
8								



Wanlian Technology Co., Ltd

REV: AO SHEET: 1/1