






The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

PIN位	2PIN	3PIN	4PIN	5PIN	6PIN	7PIN	8PIN
X值	1.50	1.00	1.00	1.00	1.00	1.00	1.00
图形							

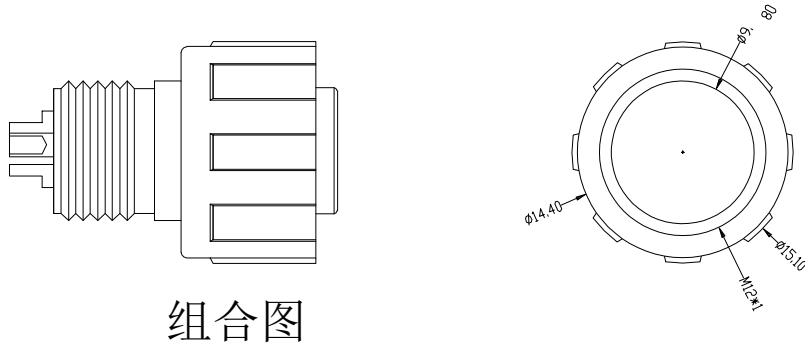

组合图

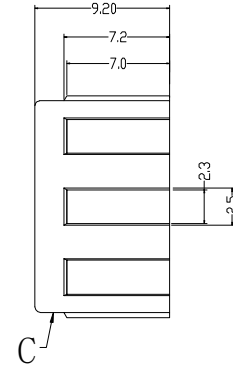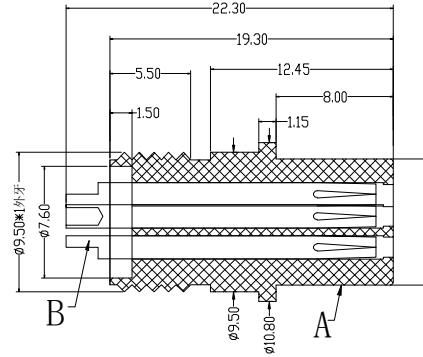

P/N	TITLE
M12Y02-08-101	M12防水 2P线端母头 Y-CODE Z款
M12Y03-08-101	M12防水 3P线端母头 Y-CODE Z款
M12Y04-08-101	M12防水 4P线端母头 Y-CODE Z款
M12Y05-08-101	M12防水 5P线端母头 Y-CODE Z款
M12Y06-08-101	M12防水 6P线端母头 Y-CODE Z款
M12Y07-08-101	M12防水 7P线端母头 Y-CODE Z款
M12Y08-08-101	M12防水 8P线端母头 Y-CODE Z款

Engagemnr firce	$\leq 50N$	Rated volage	2-5pin:60v 6-8PIN:30V	PARTS	MARERIALS	TREATMENT	AMOUNT	
Disengagement force	$\geq 5N$	Rated current	2pin:7.5A 3-8PIN:2A					
Mechanical lifespan	≥ 500	Insulation resirance	$\geq 1000M\Omega$	A	HOUSING	PA66+GF	SPECIFY COLOR	1
IP rating	IP67/IP68	Conract resistange	$\leq 10M\Omega$	B	CONTACT	BRASS	GOLD PLATED	2~8
Flammability	UL94 V-0	Operation Temperature	$-40^{\circ}C \sim 105^{\circ}C$	C	NUT	PA66+GF	BLACK	1
				D	O-RING	EPDM	BLACK	1

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1						
			UNIT:mm	0.00 ± 0.25	$X' \pm 3'$	APPROVED			M12XXX-08-101	ENDE05		
			SIZE: A4	0.000 ± 0.10	$X'X' \pm 2'$	DESIGNER			TITLE:	M8防水 2~8P线端母头Y-CODE Z款		REV: A0
						DRAWN						