The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

PIN位	2PIN	3PIN	4PIN
图形			



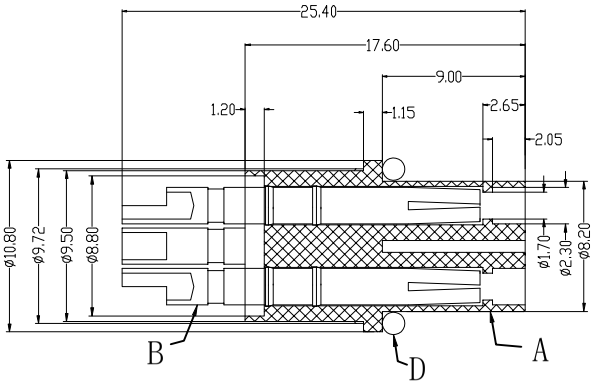



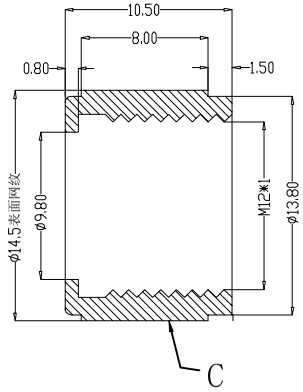



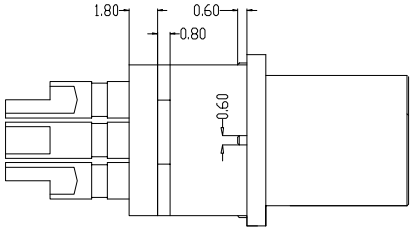

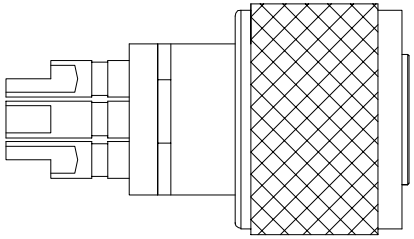

P/N	TITLE
M12T02-08-107	M12 2P线端母头 T-CODE +10.5L双网纹螺母
M12T03-08-107	M12 3P线端母头 T-CODE +10.5L双网纹螺母
M12T04-08-107	M12 4P线端母头 T-CODE +10.5L双网纹螺母

Engagemenr firce	≤50N	Rated volage	50v/63v
Disengagement force	≥10N	Rated current	12A
Mechanical lifespan	≥500	Insulation resisrance	≥1000MΩ
IP rating	IP67/IP68	Conract resistangce	≤10MΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

	PARTS	MARERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRONZE	GOLD PLATED	2~4
C	NUT	BRASS	NICKL PLATED	1
D	O-RING	EPDM	BLACK	1
E				

REV.	REVISION RECORD	DATE
A0	NEW RELEASE	21.11.17

UNIT: mm

SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.35	X°REF±6°
0.00±0.25	X°±3°
0.000±0.10	X°X' ±2°

SCALE: 1:1	NAME	DATE
APPROVED		
DESIGNER		
DRAWN		

PART.NO: M12XXX-08-107

DWG.NO: ENDE05

TITLE: M12 2~4P线端母头 T-CODE +10.5L双网纹螺母

万连科技 WanLian Teconology Co., Ltd

REV: A0

SHEET: 1/1