


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

Item NO.料号	mm/inch 主要尺寸		
	W	L	F
WLLA20-100AB030A01	2.8±0.2	14.8±0.3	10.0±0.3
WLLA20-140AB030A01	2.4±0.2	18.9±0.3	14.1±0.3
WLLA20-180AB030A02	2.2±0.2	22.8±0.3	18.0±0.3

RoHS

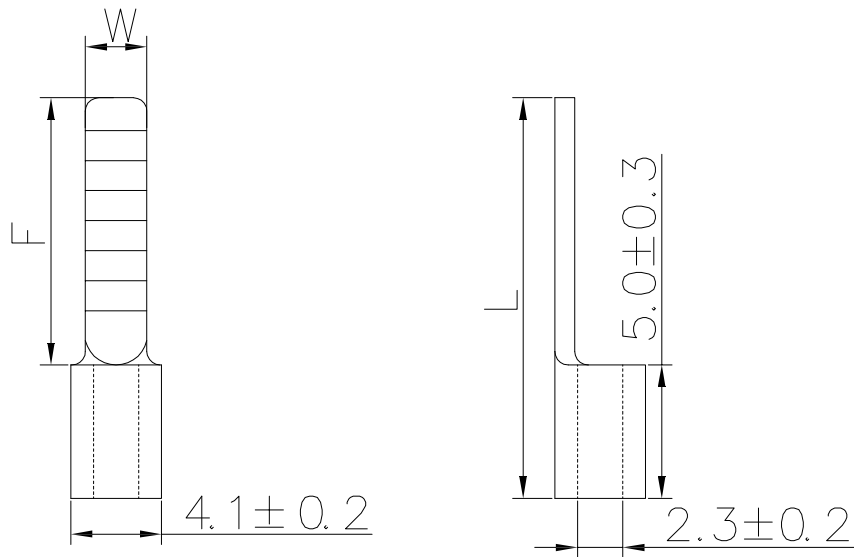

- 备注:
1. 接压线径: 1.5-2.5mm² (16-14AWG)
 2. 端子材质: 紫铜, 厚度: 0.8±0.03
缝隙: 焊接
 3. 表面处理: 镀锡, 镀层厚度: 2.5 μm-5 μm,
镀层温度: 120° /2小时
 5. 接线类型: 绞合线
 6. 最大电流: 27A

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	22.05.09		LINEAR 0.0±0.35 ANGLES X°REF±6°	APPROVED Wang_jr 22.05.09	DESIGNER Han_Gao 22.05.09	TITLE: 无绝缘护套片形单粒端子 DBN2系列	DWG.NO: ENDE05	REV: A0	SHEET: 1/1	
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Han_Gao	22.05.09			
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	LanXuan_Hou	22.05.09			