
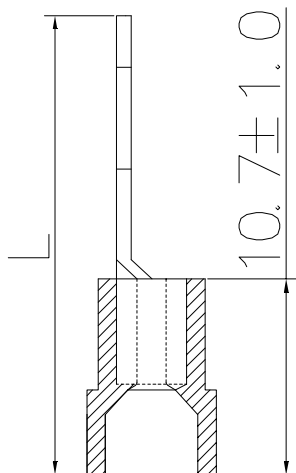


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

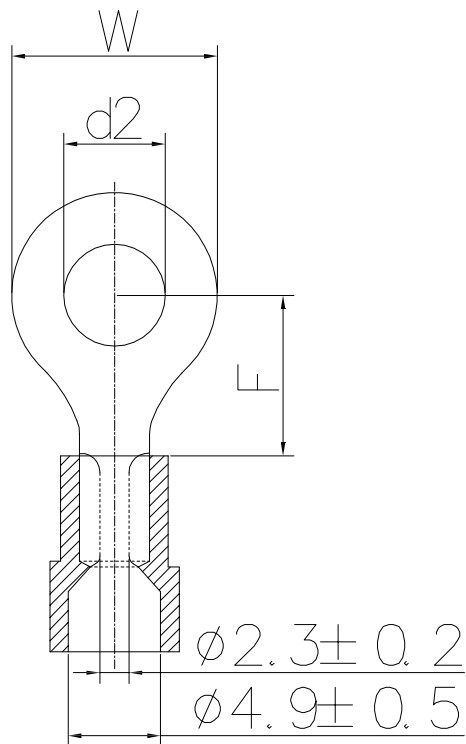

备注:

1. 接压线径: 1.5-2.5mm² (16-14AWG)
2. 端子材质: 紫铜, 厚度: 0.8±0.03
3. 绝缘材质: PVC, 绝缘护套温度: 常温, 绝缘护套颜色: 蓝色
4. 表面处理: 镀锡, 镀层厚度: 2.5 μm-5 μm, 镀层温度: 120° /2小时
5. 接线类型: 绞合线
6. 最大电流: 27A

ItemNO.料号	螺栓规格 Stud Size	mm/inch主要尺寸			
		d2	W	F	L
WLLR13-032AB03GB30	#4	3.2±0.15	6.6±0.15	4.3±0.8	18.5±0.8
WLLR13-037AB03GB31	#6	3.7±0.15	6.6±0.15	4.7±0.8	18.5±0.8
WLLR13-037AB03GB32	#6	3.7±0.15	6.6±0.15	6.0±0.8	20.0±0.8
WLLR13-037AB03GB33	#6	3.7±0.15	8.5±0.15	7.7±0.8	22.5±0.8
WLLR13-043AB03GB34	#8	4.3±0.2	6.6±0.15	6.5±0.8	20.0±0.8
WLLR13-043AB03GB35	#8	4.3±0.2	8.5±0.15	7.7±0.8	22.5±0.8
WLLR13-053AB03GB36	#10	5.3±0.2	8.5±0.2	7.7±1.0	22.5±1.0
WLLR13-053AB03GB37	#10	5.3±0.2	9.5±0.2	7.0±1.0	22.5±1.0
WLLR13-064AB03GB38	1/4	6.4±0.3	9.5±0.2	7.0±1.0	22.5±1.0
WLLR13-064AB03GB39	1/4	6.4±0.3	12.0±0.2	11.0±1.0	27.6±1.0
WLLR13-084AB03GB40	5/16	8.4±0.3	12.0±0.2	11.0±1.0	27.6±1.0
WLLR13-105AB03GB41	3/8	10.5±0.3	14.6±0.2	13.0±1.0	31.2±1.0
WLLR13-130AB03GB42	1/2	13.0±0.3	19.2±0.2	16.5±1.0	36.5±1.0

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	22.04.13		LINEAR	ANGLES	APPROVED	Wang_jr	22.04.13	WLLR13-XXXAB03GXXX	ENDE05	
			0.0±0.35	X'REF±6'	DESIGNER	Han_Gao	22.04.13	TITLE:		半绝缘PVC绝缘护套0形端子 压线14-16AWG REV: A0 SHEET: 1/1	
			UNIT:mm	X'±3'	DRAWN	LanXuan_Hou	22.04.13				
			SIZE: A4	0.000±0.10	X'X' ±2'						