



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

LS: 4.8 ± 0.2



IH: 4.8 ± 0.2
WH: 3.6 ± 0.2

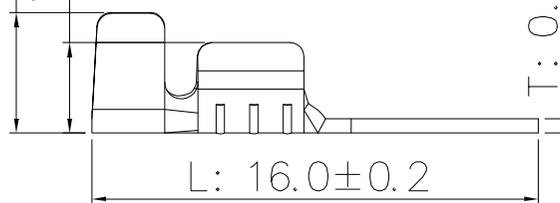


L: 16.0 ± 0.2

T: 0.4 ± 0.02

备注:

1. 接压线径: 16-20AWG
2. 端子材质: 黄铜
3. 表面处理: 镀锡

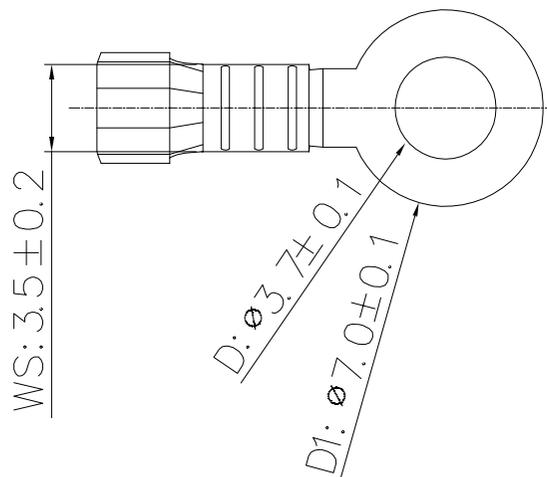

WS: 3.5 ± 0.2

D: $\phi 3.7 \pm 0.1$

D1: $\phi 7.0 \pm 0.1$

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
AO	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09	WLLR20-000AA030B56	ENDE05	
			UNIT:mm	0.00 ± 0.25	$X' \pm 3'$	DESIGNER	Han_Gao	22.05.09	TITLE:		REV: A0
			SIZE: A4	0.000 ± 0.10	$X'X' \pm 2'$	DRAWN	LanXuan_Hou	22.05.09	无绝缘R型圆环连续端子 料厚0.4/0.5mm		