


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

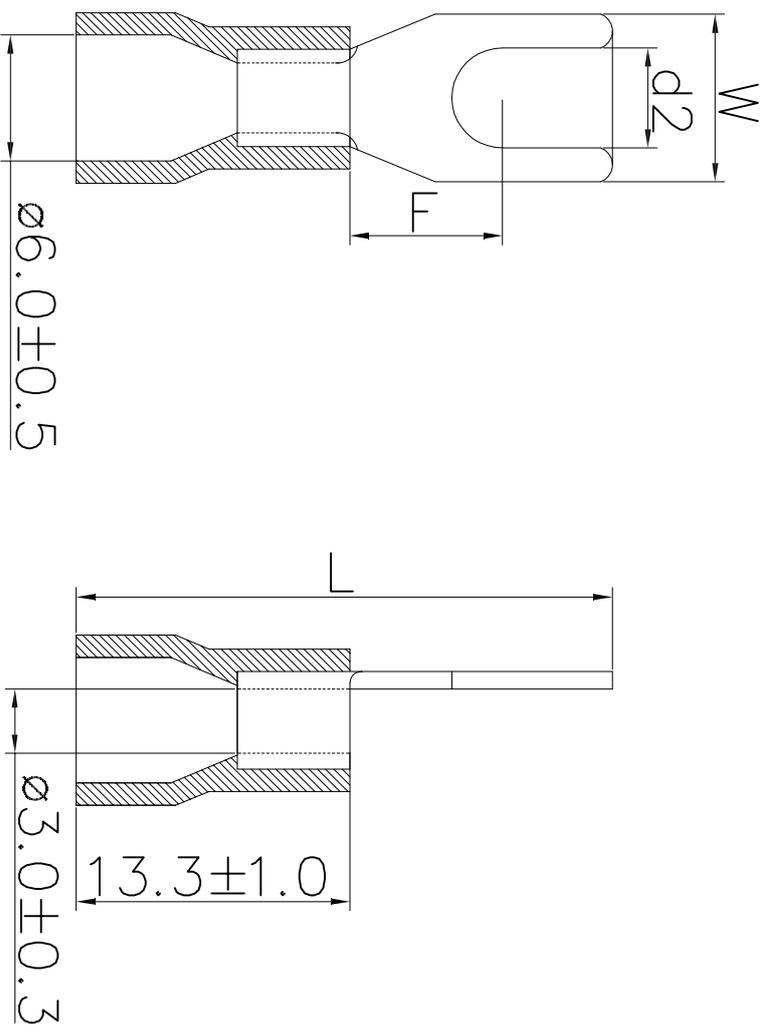

- 备注:
1. 接压线径: 2.5-4.0mm<sup>2</sup> (14-12AWG)
  2. 端子材质: 紫铜 厚度: 1.0±0.03
  3. 绝缘材质: 尼龙 绝缘护套温度: 105℃ 绝缘护套颜色: 黑色
  4. 表面处理: 镀锡 镀层厚度: 2.5um-5um 镀层温度: 120° /2小时
  5. 接线类型: 绞合线
  6. 最大电流: 37A

ItemNO.料号	规格	mm/inch 主要尺寸			
		Stud Size	d2	W	F
WLSVN4-032030115-149	#4	3.2±0.15	5.7±0.15	7.0±1.0	25.2±1.0
WLSVN4-042030116-149	#8	4.3±0.15	7.2±0.15	7.0±1.0	25.2±1.0
WLSVN4-042030117-149	#8	4.3±0.15	8.0±0.15	7.0±1.0	25.2±1.0
WLSVN4-052030118-149	#10	5.3±0.15	8.0±0.15	7.0±1.0	25.2±1.0
WLSVN4-062030119-149	1/4	6.4±0.15	12.0±0.15	8.7±1.0	28.7±1.0

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART:NO:	DWG:NO:	REV:	
AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	1:1	Wang_jr	21.11.17	WLSVN4-XX2030XXX-149	ENDE05	A0	
			0.0±0.35	X'REF±6°	APPROVED	Han_gao	21.11.17	TITLE: 尼龙绝缘Y形连续端子 SVN3.5-4 接线14-12AWG 黑色	REV: A0	SHEET: 1/1	
			UNIT:mm	X'±3°	DESIGNER	Zijun_Huang	21.11.17				
			SIZE: A4	X'X' ±2°	DRAWN						

