

The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements





RoHS


NOTE:

1. MATERIAL SPECIFICATION:
  - 1-1. HOUSING: PA9T, UL94V-0
  - 1-2. CONTACTS: PHOSPHOR BRONZE
2. PLATING SPECIFICATION:
  - 2-1. CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
3. MECHANICAL PERFORMANCE:
  - 3-1. RETENTIVITY FORCE: 0.2KGF/pin min
  - 3-2. DURABILITY: 100 CYCLES.
4. ELECTRICAL PERFORMANCE:
  - 4-1. CURRENT RATING: 1A AC/DC
  - 4-2. RATED VOLTAGE : 300V AC/DC
  - 4-3. CONTACT RESISTANCE: 20 mΩ MAX
  - 4-4. INSULATION RESISTANCE: 1000MΩ Min
  - 4-5. DIELECTRIC WITHSTANDING : 300V
5. ENVIRONMENTAL PERFORMANCE:
  - 5-1. OPERATING TEMPERATURE: -40°C~+105°C.
6. PACKAGE SPEC: REEL
7. P/N:

FH1007 21 F 0-2 XX 1 X X X 01

SERIES NO:	FH1007	21	F	0-2	XX	1	X	X	X	01	HOUSING: 1-PA9T
HEIGHT:	21:	2.1mm									COLOR: A-BLACK K-WHITE S-NATURE
MALE FEMALE:	F										PLATING: A-ALL AU G/F C-BRIGHT TIN D-MATTE Tin
ANGLE:	0-180°										TERMIPOINT: 1-DIP
ROW NO:	2-DOUBLE ROW										
PIN Q' PY:	02~80										

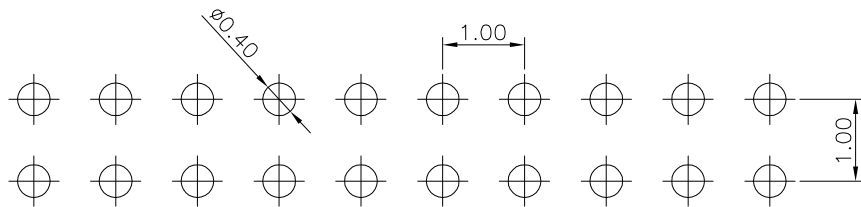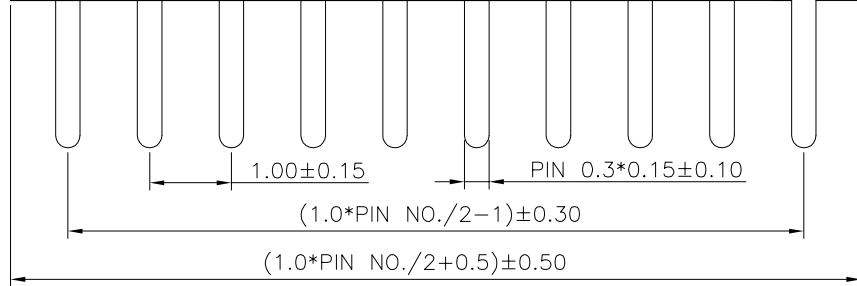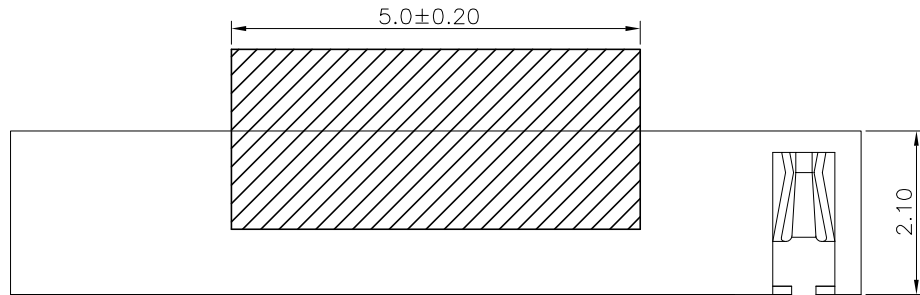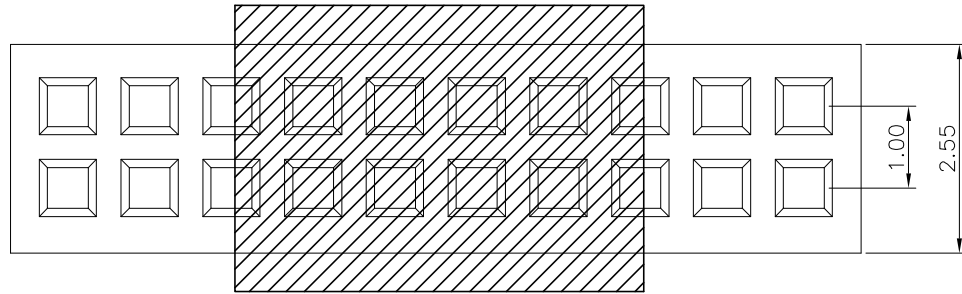

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.05.09		LINEAR	ANGLES	1:1	Wang_jr	22.05.09	FH100721F0-2XX1XXX01	ENDE05	
			0.00±0.25	X'±3°	APPROVED	Han_Gao	22.05.09	TITLE: Pitch 1.00mm 180° 双排 DIP 排母 塑高 2.1mm PC2.0			REV: A0    SHEET: 1/1
			0.00±0.10	X'X' ±2°	DESIGNER	LanXuan_Hou	22.05.09				
			SIZE: A4		DRAWN						