
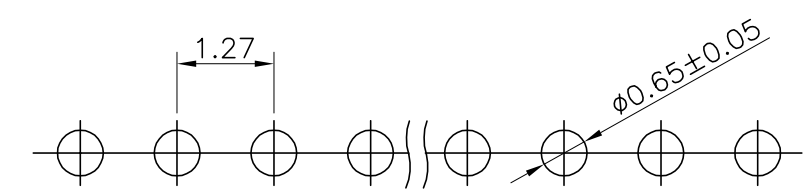

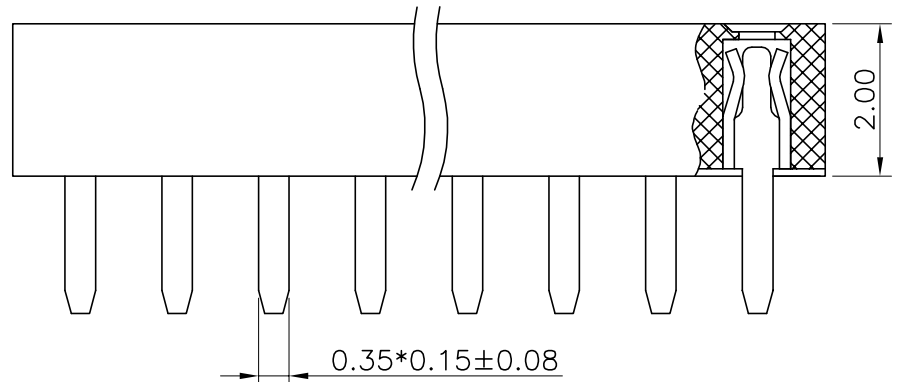


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

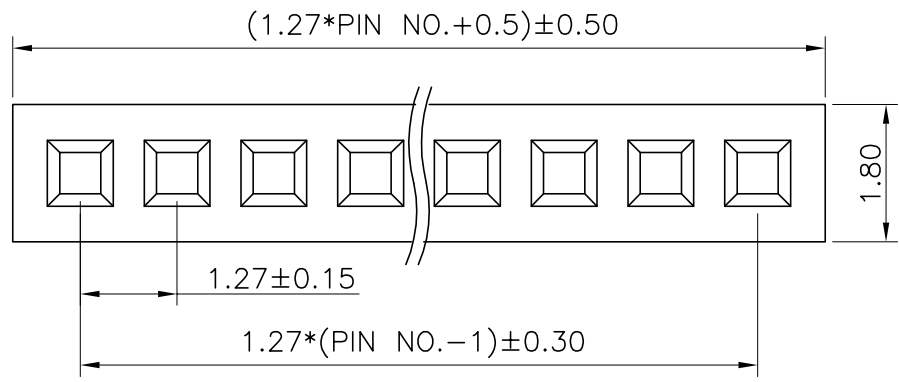

Recommended PCB layout

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PA9T,UL94V-0
 1-2.CONTACTS: Phosphor Bronze
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 GOLD FLASH/TIN OVER NICKEL
 3.ELECTRICAL PERFORMANCE:
 3-1.CURRENT RATING: 1A
 RATED VOLTAGE : 300V AC/DC
 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 3-3.INSULATION RESISTANCE: 1000MΩ Min
 3-4.DIELECTRIC WITHSTANDING : 300V
 4.ENVIRONMENTAL PERFORMANCE:
 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
 5.PACKAGE SPEC: Tube
 6.P/N:

FH1276 20 F 0-1 XX 1 X X X 01
 SERIES NO: _____ HOUSING: 1-PA9T
 HEIGHT: _____ 20: 2.0mm COLOR: A-BLACK
 MALE FEMALE: _____ PLATING: A-Au G/F H-Au 15u
 F-FEMALE
 ANGLE: _____ 0-180°
 ROW NO: _____ 2-DOUBLE ROW
 PIN Q'PY: _____ TERMIPOINT: 1-DIP
 04~100

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: FH127620FO-1XX1XXX01	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
AO	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15			
			UNIT: mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	21.10.15	TITLE:		
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Gao_Han	21.10.15	1.27MM U型 DIP 180度单排母 H2.0W1.8 PC2.0		
									REV: A0	SHEET: 1/1	