
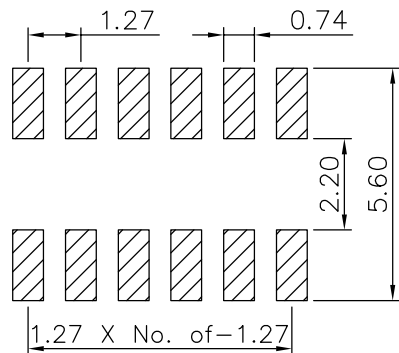
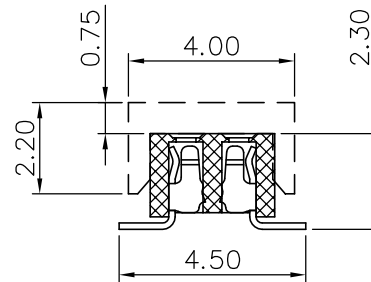
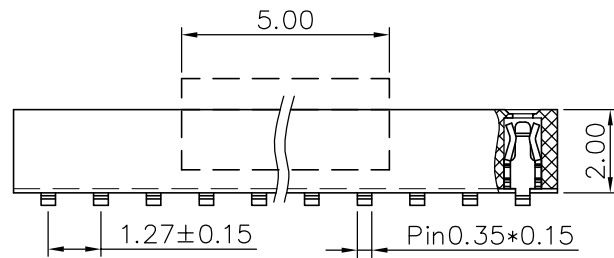


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS

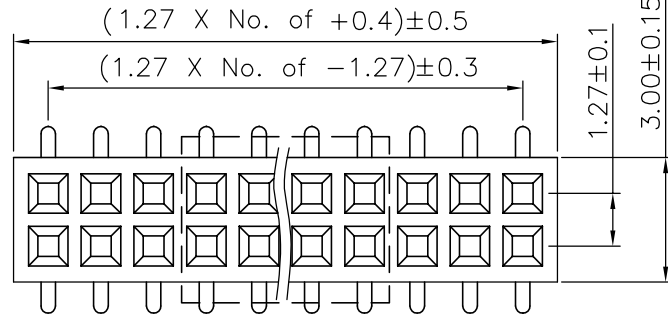

RECOMMEND P. C. B LAYOUT  
PCB TOLERANCE: ±0.05 (TOP VIEW)

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.HOUSING: THERMOPLASTIC HIGH TEMP, UL94V-0
  - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
  - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
  - 3-1.RETENTIVITY FORCE: 0.2KGF/pin min
  - 3-2.DURABILITY: 100 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
  - 4-1.CURRENT RATING: 1A AC/DC  
RATED VOLTAGE : 300V AC/DC
  - 4-2.CONTACT RESISTANCE: 20 mΩ MAX
  - 4-3.INSULATION RESISTANCE: 1000MΩ Min
  - 4-4.DIELECTRIC WITHSTANDING : 300V
- 5.ENVIRONMENTAL PERFORMANCE:
  - 5-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 6.PACKAGE SPEC: REEL
- 7.P/N:

FH1276 20 F 0-2 XX 2 X X X 01

SERIES NO: \_\_\_\_\_ HOUSING: 1-PA6T

HEIGHT: \_\_\_\_\_ COLOR: A-BLACK

20: 2.0mm

MALE FEMALE: \_\_\_\_\_ PLATING: A-ALL AU G/F

F-FEMALE

ANGLE: \_\_\_\_\_


0-180°

ROW NO: \_\_\_\_\_

2-DOUBLE ROW

PIN Q'PY: \_\_\_\_\_ TERMIPOINT: 2-SMT

02~80

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.05.09		LINEAR	ANGLES	1:1	Wang_jr	22.05.09	FH127620F0-2XX2XXX01	ENDE05	
			0.00±0.25	X'±3°		DESIGNER	Han_Gao	22.05.09	TITLE:		REV: A0 SHEET: 1/1
			0.00±0.10	X'X' ±2°		DRAWN	LanXuan_Hou	22.05.09	Pitch 1.27mm 180° 双排 SMT+CAP 排母H2.0 W3.0 PC4.5		