

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements




RoHS



NOTE:

- 1.MATERIAL SPECIFICATION:
1-1.HOUSING: UL94V-0
1-2.CONTACTS: PHOSPHOR BRONZE A1
- 2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 1A
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
- 4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: REEL
- 6.P/N:

SERIES NO: FH1276 21 F 0-2 XX 2 X X X 01
HEIGHT: 21:2.1mm
MALE FEMALE: F-FEMALE
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
PIN Q'PY: 02~80
HOUSING: 1-PA6T
COLOR: A-BLACK
PLATING: A-ALL AU G/F
TERMIPOINT: 2-SMT

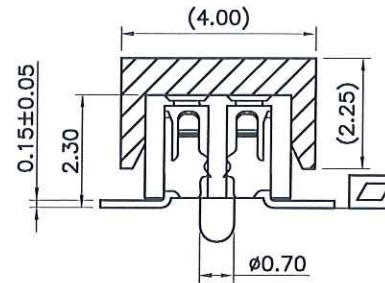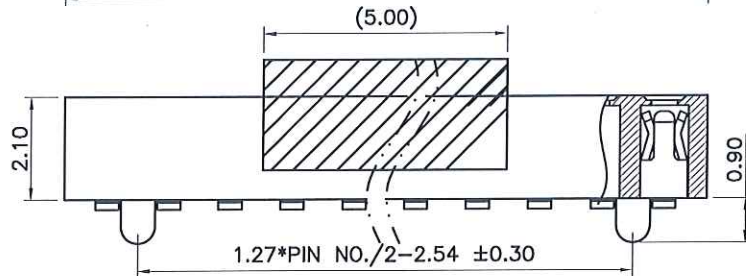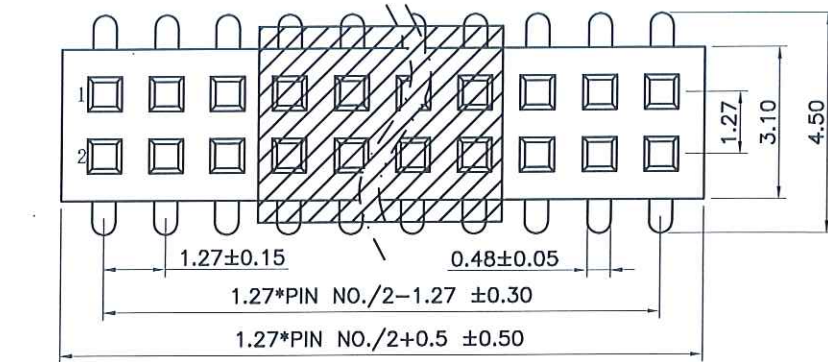

RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE:±0.05)

2*2~2*15P		0.10
2*16~2*20P		0.12
2*21~2*40P		0.15

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.10.15	LINEAR	1:1	APPROVED	25.1.7	FH127621F0-2XX2XXX01	ENDE05		
A1	UPDATE TERMINAL MATERIAL	25.01.06	0.0±0.35		DESIGNER	25.01.07	TITLE: 1.27双排母H2.1 带柱SMT+CAP系列		REV: A1	SHEET: 1/1
			0.00±0.25		DRAWN	25.01.07				
			0.000±0.10							