


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

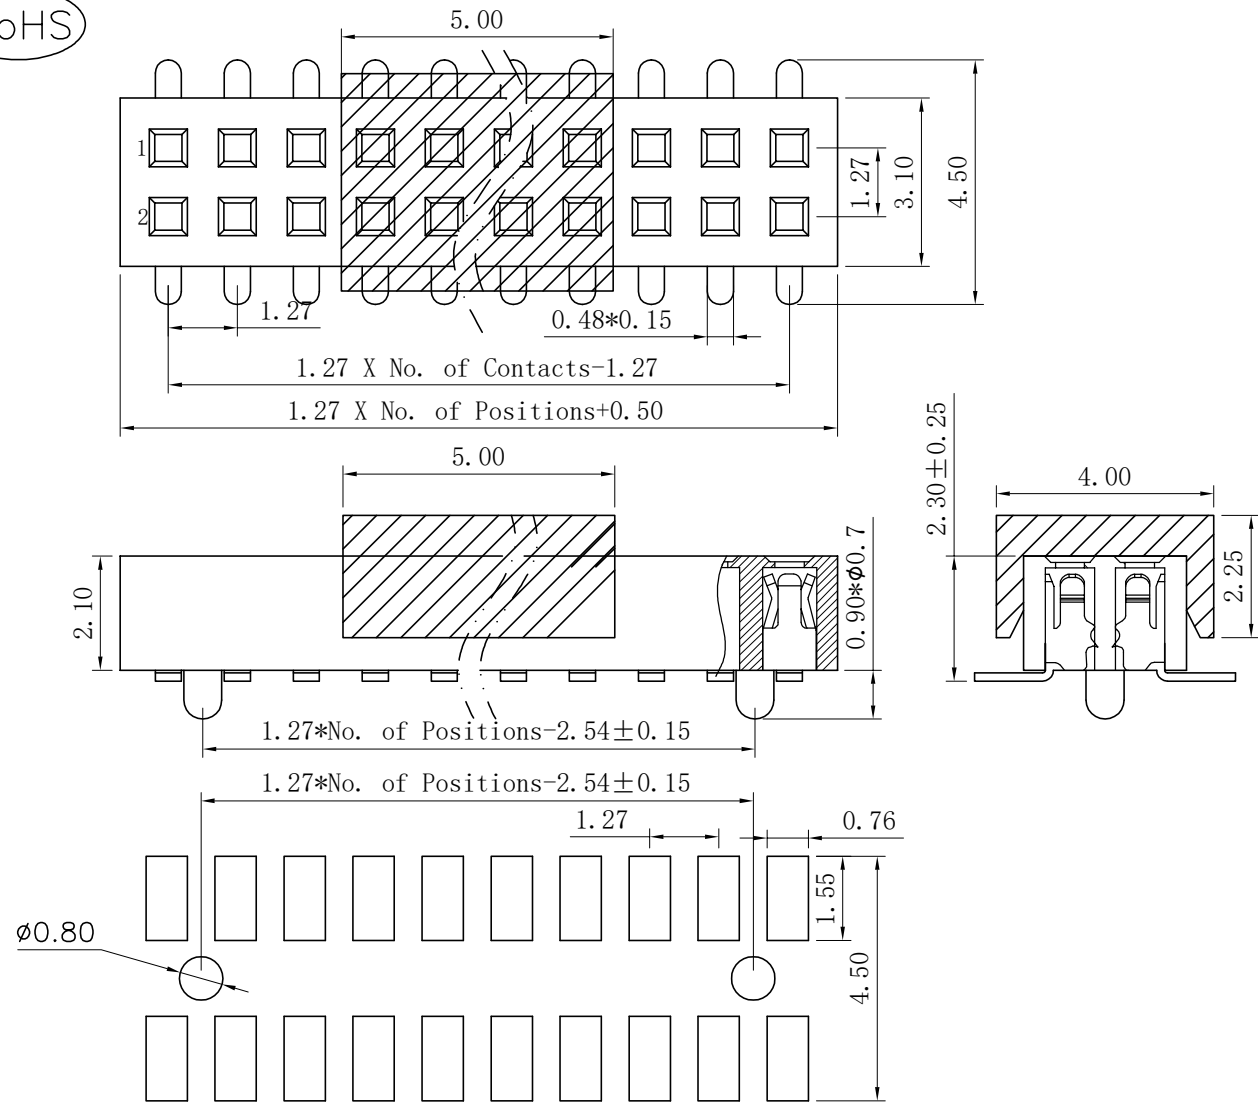

RECOMMENDED P. C. B LAYOUT

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
- 3.MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 0.2kgf/PIN MIN
 - 3-2.DURABILITY: 100 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 1A
 - RATED VOLTAGE : 300V AC/DC
 - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 300V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: REEL
- 6.P/N:

SERIES NO: FH1276 21 F 0-2 XX 2 X X X 01
 HEIGHT: 21:2.1mm
 MALE FEMALE: F-FEMALE
 ANGLE: 0-180°
 ROW NO: 2-DOUBLE ROW
 PIN Q'PY: 02~80
 HOUSING: 1-PA6T, 2-LCP, 3-PBT
 COLOR: A-BLACK
 PLATING: A-ALL AU G/F
 TERMPIENT: 2-SMT

| REV. | REVISION RECORD | DATE | UNIT:mm | GENERAL TOLERANCES | | SCALE: | NAME | DATE | PART.NO: FH127621F0-2XX2XXX01 | DWG.NO: ENDE05 | TITLE: 1.27双排排母H2.1 带柱SMT+CAP系列 |
|------|-----------------|----------|-----------|--------------------|----------|---------|----------|---------|----------------------------------|-------------------|------------------------------------|
| A0 | NEW RELEASE | 21.10.15 | | LINEAR | ANGLES | 1:1 | APPROVED | Wang_jr | | | |
| | | | 0.00±0.25 | X'±3' | DESIGNER | Gao_Han | 21.10.15 | | | | |
| | | | 0.00±0.10 | X'X' ±2' | DRAWN | Gao_Han | 21.10.15 | | | | |



WanLian Technology Co., Ltd
 REV: A0 SHEET: 1/1