
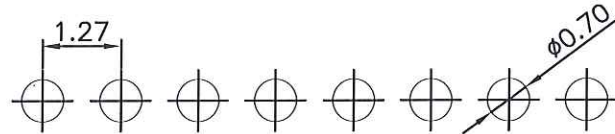
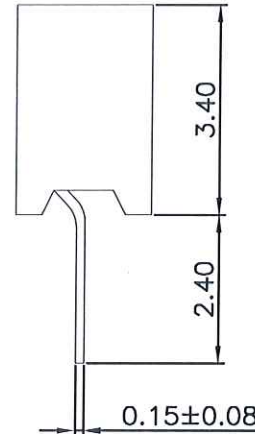
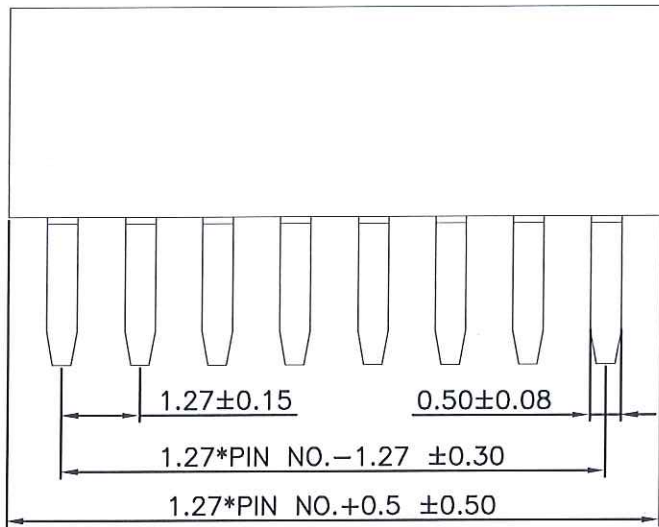


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

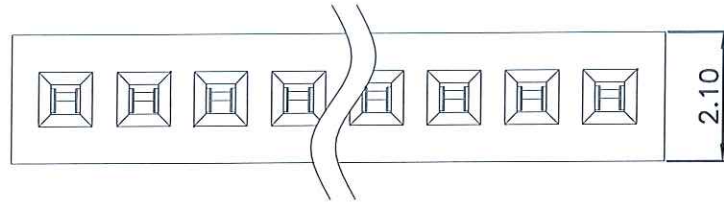

RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE:±0.05)

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: UL94V-0

1-2.CONTACTS: PHOSPHOR BRONZ

2.PLATING SPECIFICATION:

2-1.CONTACTS:

GOLD FLASH OVER NICKEL

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 1A

3-2.CONTACT RESISTANCE: 20 mΩ MAX

3-3.INSULATION RESISTANCE: 1000MΩ Min

3-4.DIELECTRIC WITHSTANDING : 300V

4.ENVIRONMENTAL PERFORMANCE:

4-1.OPERATING TEMPERATURE: -40°C~+105°C.

5.PACKAGE SPEC: TUBE

6.P/N:

FH1276 34 F 0-1 XX 1 X X X 01
SERIES NO: _____ HOUSING: 1-PAGT
HEIGHT: _____ 34: 3.4mm
MALE FEMALE: _____ COLOR: A-BLACK
F-FEMALE
ANGLE: _____ PLATING: A-ALL AU G/F
0-180°
ROW NO: _____
1-SINGLE ROW
PIN Q'PY: _____ TERMIPOINT: 1-DIP
02~40



REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: FH127634F0-1XX1XXX01	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	王江	25.1.7			
A1	UPDATE TERMINAL MATERIAL	25.01.06		0.0±0.35	X'REF±6°	DESIGNER	王江	25.01.07 <th rowspan="3">TITLE: 1. 27 180° U型 单排排母 II3. 4W2. 1 180U型 PC2. 4</th>	TITLE: 1. 27 180° U型 单排排母 II3. 4W2. 1 180U型 PC2. 4		
				UNIT:mm	0.00±0.25	X'±3°	DRAWN	黄容		25.01.07	
				SIZE: A4	0.000±0.10	X'X' ±2°					
									REV: A1	SHEET: 1/1	