
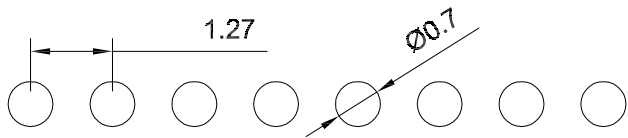
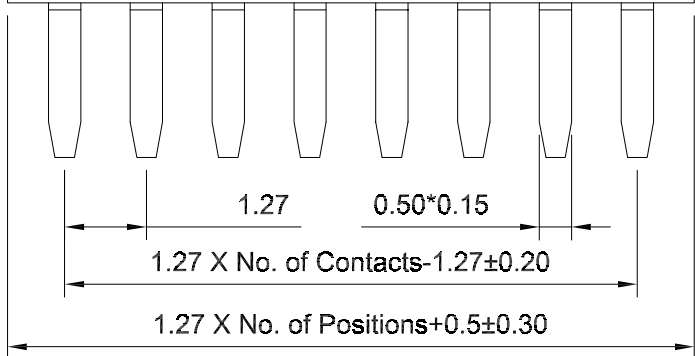
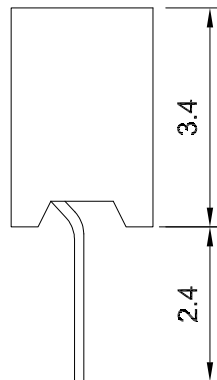


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS

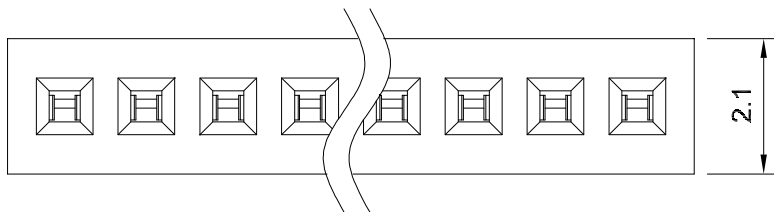

RECOMMENDED P. C. B LAYOUT

P. C. B TOLERANCE: ±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.HOUSING: UL94V-0
  - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
  - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
  - 3-1.RETENTIVITY FORCE: 0.2kgf/pin min
  - 3-2.DURABILITY: 100 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
  - 4-1.CURRENT RATING: 1A
  - RATED VOLTAGE : 300V AC/DC
  - 4-2.CONTACT RESISTANCE: 20 mΩ MAX
  - 4-3.INSULATION RESISTANCE: 1000MΩ Min
  - 4-4.DIELECTRIC WITHSTANDING : 300V
- 5.ENVIRONMENTAL PERFORMANCE:
  - 5-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 6.PACKAGE SPEC: TUBE
- 7.P/N:

FH1276 34 F 0-1 XX 1 X X X 01

SERIES NO: \_\_\_\_\_ HOUSING: 1-PA6T

HEIGHT: \_\_\_\_\_ COLOR: A-BLACK

34: 3.4mm

MALE FEMALE: \_\_\_\_\_ PLATING: A-ALL AU G/F

F-FEMALE

ANGLE: \_\_\_\_\_ PLATING: A-ALL AU G/F

0-180°

ROW NO: \_\_\_\_\_

1-SINGLE ROW

PIN Q'PY: \_\_\_\_\_ TERMIPOINT: 1-DIP

02~40

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	1:1	Wang_jr	22.10.28			
			UNIT:mm	X'±3'	DESIGNER	Han_Gao	22.10.28	TITLE:		REV: A0	SHEET: 1/1
			SIZE: A4	X'X' ±2'	DRAWN	LanXuan_Hou	22.10.28	1.27 180° U型 单排排母 H3.4W2.1 180U型 PC2.4			