

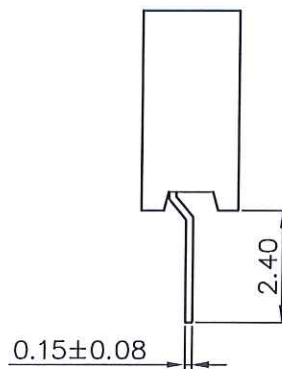
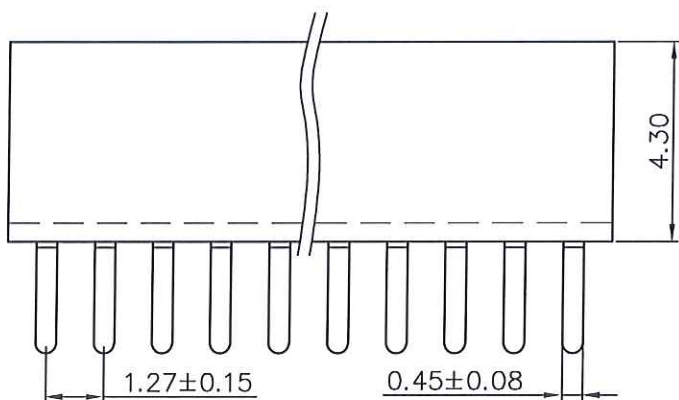


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

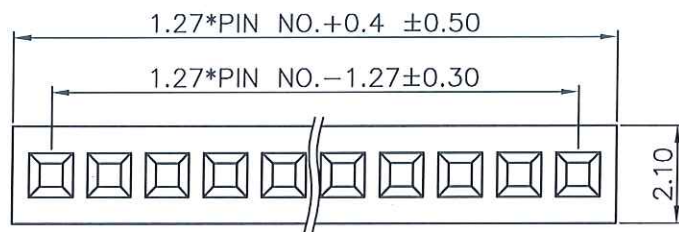

RECOMMEND P. C. B LAYOUT

PCB TOLERANCE: ±0.05 (TOP VIEW)

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: UL94V-0

1-2.CONTACTS: PHOSPHOR BRONZE

2.PLATING SPECIFICATION:

2-1.CONTACTS:

GOLD FLASH OVER NICKEL

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 1A

3-2.CONTACT RESISTANCE: 20 mΩ MAX

3-3.INSULATION RESISTANCE: 1000MΩ Min

3-4.DIELECTRIC WITHSTANDING : 300V

4.ENVIRONMENTAL PERFORMANCE:

4-1.OPERATING TEMPERATURE: -40°C~+105°C.

5.PACKAGE SPEC: TUBE

6.P/N:

SERIES NO: FH1276 43 F 0-1 XX 1 X X X 02
HEIGHT: 43: 4.3mm
MALE FEMALE: F-FEMALE
ANGLE: 0-180°
ROW NO: 1-SINGLE ROW
PIN Q' PY: 02~40
HOUSING: 1-PA6T
COLOR: A-BLACK
PLATING: A-ALL AU G/F
TERMIPOINT: 1-DIP



REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1			FH127643F0-1XX1XXX02	ENDE05	
A1	UPDATE TERMINAL MATERIAL	25.01.06		0.0±0.35	X'REF±6°		APPROVED	25.1.7			
				0.00±0.25	X'±3°		DESIGNER	25.01.07	TITLE:		
				SIZE: A4	X'X' ±2°		DRAWN	25.01.07	Pitch 1.27mm 180° 单排 DIP 排母 排母H4.3 W2.1 PC2.4		

REV: A1 SHEET: 1/1